

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-075-20220-00-00  
Spot: NWSENWSE Sec/Twnshp/Rge: 23-22S-42W  
1963 feet from S Section Line, 1910 feet from E Section Line  
Lease Name: HCU Well #: 2322  
County: HAMILTON Total Vertical Depth: 2700 feet

Operator License No.: 33999  
Op Name: LINN OPERATING, INC.  
Address: 600 TRAVIS STE 5100  
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	2700	0	WITH 550 SX CMT
SURF	8.625	220		WITH 175 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/13/2012 2:00 PM  
Plug Co. License No.: 34271 Plug Co. Name: KIVETT PLUGGING & PIPE PULLING, INC.  
Proposal Rcvd. from: KENNETH KIVETT Company: KIVETT PLUGGING & PIPE PULLING Phone: (580) 363-3036

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 11/13/2012 4:30 PM KCC Agent: KEN JEHLIK

Actual Plugging Report:

RAN TBG TO 2540' & SPOTTED 70 SX CMT WITH 200# HULLS. FULL CIRCULATION. PULL TBG TO 1200' & CIRCULATED CMT TO SURFACE USING 80 SX CMT & 200# HULLS. TOOH W/TBG & TOP OFF WITH 15 SX CMT. PUMP 30 SX CMT DOWN ANNULUS TO 250#. HOLDING.

Perfs:

Top	Bot	Thru	Comments
2607	2617		
2598	2601		
2590	2595		

RECEIVED  
NOV 27 2012  
KCC WICHITA

Remarks: \*\*COMPLIANCE ISSUE: DENIED TA HIGH FL\*\* USED 60/40 POZMIX 4% GEL BY CONSOLIDATED.

Plugged through: CSG


District: 01

RECEIVED

NOV 20 2012

KCC DODGE CITY

Signed

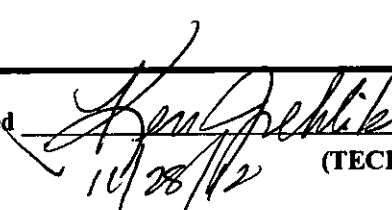

(TECHNICIAN)

ADP