

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-061-20066-00-00
Spot: SWNENE Sec/Twnshp/Rge: 12-12S-7E
990 feet from N Section Line, 990 feet from E Section Line
Lease Name: ROESTER Well #: 01-08 HENRY
County: GEARY Total Vertical Depth: 2740 feet

Operator License No.: 30345
Op Name: PIQUA PETRO, INC.
Address: 1331 XYLAN RD
PIQUA, KS 66761

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	1955		400 SX 60/40 POZ CMT
SURF	8.625	308		175 SX CLASS A CMT

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 07/12/2011 8:00 AM
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC
Proposal Rcvd. from: GREG LAIR Company: _____ Phone: (620) 433-0099

Proposed Plugging Method: PER KCC RULES & REGS

Plugging Proposal Received By: _____ WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 07/12/2011 8:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

TIED ONTO 4.5" CASING AND ESTABLISHED 2 BPM @ 800 PSI. PUMPED 140 SX AND INITIALLY HELD 1400#, THEN WELL WENT ON SLOW VACUUM. RIGGED UP UNIT AND RAN 350' OF 1" DOWN ANNULUS AND PUMPED 75 SX. TOPPED OFF INSIDE CASING WITH AN ADDITIONAL 35 SX. 60X40 POZ < 4% GEL.

Perfs:

Top	Bot	Thru	Comments
1841	1851		ARBUCKLE

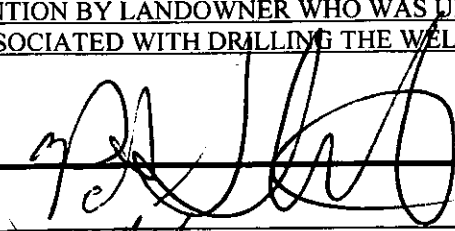
RECEIVED
OCT 25 2012
KCC WICHITA

Remarks: WELL WAS BROUGHT TO THE KCC'S ATTENTION BY LANDOWNER WHO WAS UPSET ABOUT THE AMOUNT OF UNCOMPLETED CLEAN UP ASSOCIATED WITH DRILLING THE WELL.

Plugged through: CSG

District: 02

Signed _____


11/26/12 (TECHNICIAN)

✓ X