


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

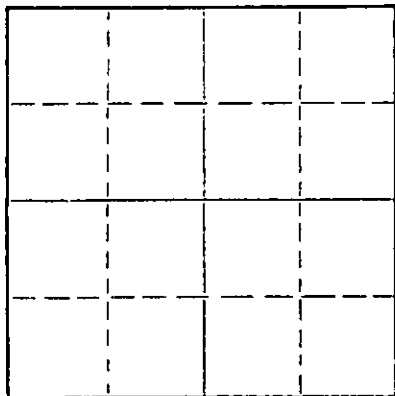

Locate well correctly on above
Section Plat

Comanche County. Sec30 Twp.33S Rge. (E) 16 (W)
Location as "NE/CNWxSWx" or footage from lines C SE SE
Lease Owner Zenith Drilling Corporation, Inc.
Lease Name Gregg Well No. 1-30
Office Address 300 West Douglas, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Aug. 15, 19 68
Application for plugging filed Aug. 26, 19 68
Application for plugging approved (phone 8/15/68) Aug. 15, 19 68
Plugging commenced Aug. 15, 19 68
Plugging completed Aug. 15, 19 68
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ralph Warren
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 5095 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	RECEIVED STATE CORPORATION COMMISSION AUG 28 1968 CONSERVATION DIVISION Wichita, Kansas	0	265	8-5/8"	265	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 250 feet, set first plug @ 250 feet with 1/2 sack hulls and 25 sacks cement. Filled hole with mud to 40 feet, set second plug @ 40 feet with 1/2 sack hulls and 10 sacks cement. Plugged rat hole with 2 sacks cement. Job complete @ 6:30 P.M., Aug. 15, 1968.


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
E. E. HALL (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E E Hall
830 Sutton Place, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 26 day of August, 19 68



Barbara J. Layton
Barbara J. Layton, Notary Public.

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

GREGG #1-30
C SE SE Section 30-33S-16W
Comanche County, Kansas

Commenced: August 1, 1968
Completed: August 15, 1968

OPERATOR - Zenith Drilling Corporation, Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	265	Surface clay and red bed	Ran 7 joints 8-5/8" casing, set @ 265' w/225 sacks cement.
265	1300	Red bed	
1300	1400	Shale	
1400	2030	Shale and shells	
2030	2285	Shale and lime	
2285	3040	Lime	
3040	3522	Lime and shale	
3522	3575	Lime	
3575	4400	Lime and shale	
4400	5095	Lime	
5095	TD		Dry and abandoned.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C SE SE Section 30-33S-16W, Comanche County, Kansas, to the best of my knowledge and belief.

E. E. Hall

E. E. HALL


STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 26th day of August, 1968, personally appeared E. E. HALL, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

Barbara J. Layton
Barbara J. Layton, Notary Public

My Commission Expires February 1, 1972.



RECEIVED
STATE CORPORATION COMMISSION
AUG 28 1968
CONSERVATION DIVISION
Wichita, Kansas