

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bittling Building  
Wichita, Kansas

Barber County, Sec. 12 Twp. 35 Rge. (E) 12 (W)

Location as "NE/CNW&SW&" or footage from lines SW SW NW  
Lease Owner Rupp-Ferguson Oil Co.  
Lease Name College Well No. 1  
Office Address 522 Union Center, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9-5-56 19  
Application for plugging filed 9-6-56 19  
Application for plugging approved 9-6-56 19  
Plugging commenced 9-6-56 19  
Plugging completed 9-6-56 19  
Reason for abandonment of well or producing formation

NORTH

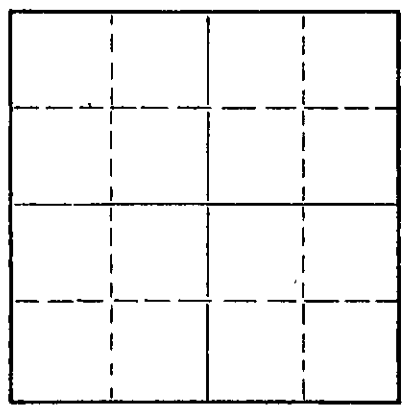

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 4865 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	306	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole w/heavy mud to 300', 1/4 sack hulls - plug - 20 sacks cement thru d.p. Mud to 35', 1/2 sack hulls, plug - cem. to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rupp-Ferguson Oil Co.  
Address 522 Union Center, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
L. W. Knox (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) L. W. Knox  
522 Union Center, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 7th day of September, 19 56

Helen Horine Notary Public.

My commission expires June 4, 1959

PLUGGING  
FILE SEC 12 T 35 R 12W  
BOOK PAGE 97 LINE 19

RECORDED  
STATE CORPORATION COMMISSION  
SEP 9 1956  
CONSERVATION DIVISION  
WICHITA, KANSAS

## CONTRACTOR'S WELL LOG

Rupp-Ferguson Oil Co. No. 1 College  
SW SW NW, Sec. 12-35-12W,  
Barber County, Kansas

Commenced: 8-21-56

Completed: 9-5-56

Contractor: Rupp-Ferguson Oil Co.

Set 306' of 8 5/8" surface casing w/210 sacks cement.

D & A

Figures Indicate Bottom of Formation

100 red bed  
120 sand & red bed  
1007 red bed & shale  
1220 shale & shells  
1300 salt  
1425 salt, shale  
1800 lime & shale  
1945 lime  
3220 shale & lime  
3235 sharp sand (hard)  
3686 lime & shale  
3768 sand & shale  
3865 lime & shale  
3971 lime, shale & sand  
4181 shale & lime  
4248 shale  
4290 sand & shale w/lime  
4434 shale & lime  
4633 lime  
4666 lime & shale  
4714 lime  
4811 lime & shale  
4865 Miss. T.D.

STATE OF KANSAS)  
SEDGWICK COUNTY) SS:

I, L. W. Knox, Landsman for Rupp-Ferguson Oil Co., do hereby certify that the above and foregoing is a true and correct copy of the log of the No. 1 College well.

L. W. Knox  
L. W. Knox

Subscribed and sworn to before me this 7th day of September, 1956.

Helen Horine  
Notary Public

My Commission Expires 6-4-59.

