

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-21189-00-01
Spot: NESE Sec/Twnshp/Rge: 31-28S-9W
1980 feet from S Section Line, 660 feet from E Section Line
Lease Name: CONRAD OWWO Well #: 31-9
County: KINGMAN Total Vertical Depth: 2522 feet

Operator License No.: 5893
Op Name: PRATT WELL SERVICE, INC.
Address: PO BOX 847
PRATT, KS 67124

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2520	1700	100 SX
SURF	8.625	247		225 SX

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 12/13/2012 8:00 AM
Plug Co. License No.: 5893 Plug Co. Name: PRATT WELL SERVICE, INC.
Proposal Rcvd. from: GARELD INSLEE Company: PRATT WELL SERVICE Phone: (620) 770-0995

Proposed
Plugging
Method:

SAND BACK TO 2380 & 4 SKS CMT. RECOVER CASING. 1500' 35 SX, 900' 35 SX, CIRC 300'-0'.

Plugging Proposal Received By: B. J. HOPE WitnessType: PARTIAL
Date/Time Plugging Completed: 12/13/2012 12:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH SAND TO 2324' AND CAPPED WITH 4 SKS CMT. REC'D 1700' OF 4 1/2 CASING. PULLED CASING TO 1490' & SPOTTED 35 SX CEMENT. PULLED CASING TO 883' & SPOTTED 35 SX CEMENT. PULLED CASING TO 303' CIRCULATED CEMENT TO SURFACE.

Perfs:

Top	Bot	Thru	Comments
2430	2432	CSG	

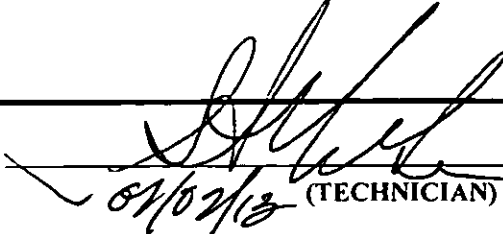
RECEIVED
DEC 21 2012
KCC WICHITA

Remarks: BASIC CEMENT 60/40 4% GEL

Plugged through: CSG

District: 02

Signed


01/02/13 (TECHNICIAN)