

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-195-21186-00-00
Spot: SWNWNE Sec/Twnshp/Rge: 28-11S-22W
990 feet from N Section Line, 2310 feet from E Section Line
Lease Name: SHAW CREEK UNIT Well #: HA 5
County: TREGO Total Vertical Depth: 4011 feet

Operator License No.: 9090
Op Name: CHARTER ENERGY, INC.
Address: PO BOX 252
GREAT BEND, KS 67530

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3400		
PROD	4.5	4011		1060 SX
SURF	8.625	257		165 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 01/18/2013 8:30 AM
Plug Co. License No.: 32810 Plug Co. Name: PROFESSIONAL PULLING SERVICES LLC
Proposal Revd. from: STEVE BAIZE / L.W. JACKS Company: PROFESSIONAL PULLING SERVIC Phone: (620) 793-9090

Proposed Plugging Method: Ordered 350 sx 60/40 pozmix 4% gel cement with 400 # hulls.

Plugging Proposal Received By: CASE MORRIS Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 01/18/2013 12:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

CIBP set at 3400' and leaked during squeeze job with packer set at 1228' which filled casing with cement from 1230' to 3400'. Drilled cement down to 1828' and casing still had leaks. Ran tubing to 1800' and pumped 130 sx cement with 200 # hulls. Good circulation of cement. Pulled tubing out. Topped off with 15 sx cement. Tied on to back side. Squeezed with 5 sx cement. Shut in pressure 300 psi.

GPS: 39.07124 -099.76782

Perfs:

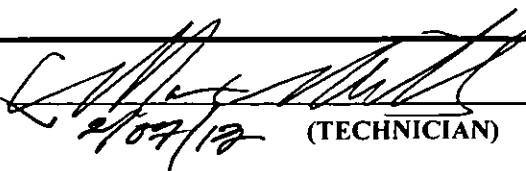
Top	Bot	Thru	Comments
3918	3926		
3590	3789		

RECEIVED
JAN 31 2013
KCC WICHITA

Remarks: QUALITY OILWELL TICKET # 5296

Plugged through: TBG

District: 04

Signed  (TECHNICIAN)

CM

JAN 25 2013