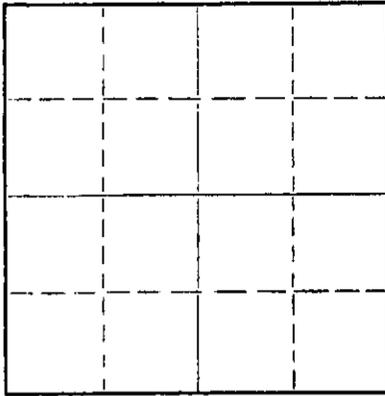


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

15-101-19020-0000

NORTH



Locate well correctly on above
Section Plat

Lane _____ County, Sec. 36 Twp. 17S Rge 28 W (NW) (W)

Location as "NE/CNW&SW" or footage from lines C NE NW
Lease Owner Jones-Gebert Oil Co.
Lease Name Wheatcroft Well No. 1
Office Address 1007 Central Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 5, 1963 19____
Application for plugging filed January 5, 1963 19____
Application for plugging approved January 5, 1963 19____
Plugging commenced January 5, 1963 19____
Plugging completed January 5, 1963 19____
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4690 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	240'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom Plug set at 640' with 30 sxs. cement
Middle Plug set at 220' with 20 sxs. cement
Top Plug at 40' w/10 sxs. cement.

JAN 15 1963
1-15-63
CONSERVATION DIVISION
STATE CORPORATION COMMISSION

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jones-Gebert Oil, Inc.
Address 1007 Central Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
George R. Jones (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George R. Jones
1007 Central Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of January 1963

Barbara J. Layton
Barbara J. Layton
Notary Public.

My commission expires February 1, 1964



DRILLERS LOG

1510119020-0000


Company: Jones-Gebert Oil Co.
 Contractor: Jones-Gebert Oil, Inc.
 Farm: #1 Wheatcroft
 C NE NW Sec. 36-17S-28W
 Lane County, Kansas
 Commenced: 12/17/62
 Completed: 1/5/63
 Casing: 240' of 8-5/8" w/150 sxs.

215	-	240	Cement
240	-	255	Formation
255	-	1215	Shale, Clay & Sand, Little Lime
1215	-	1530	Shale & Shells
1530	-	1565	Anhydrite
1565	-	1835	Shale & Shells
1835	-	1870	Red Bed & Shale
1870	-	2285	Shale & Lime Streaks
2285	-	2490	Shale & Lime
2490	-	2565	Salt Zone
2565	-	2585	Salt
2585	-	2750	Shale w/Lime Streaks
2750	-	2960	Shale & Lime Streaks
2960	-	3050	Shale & Lime
3050	-	3075	Lime
3075	-	3175	Lime w/Shale Streaks
3175	-	3265	Lime
3265	-	3290	Lime & Shale
3290	-	3345	Lime & Shale
3345	-	3420	Lime and Shale
3420	-	3580	Shale & Lime Streaks
3580	-	3735	Shale & Lime/chalk streaks
3735	-	3793	Shale & Chalk
3793	-	3924	Lime & Shale
3924	-	4001	Lime w/shale streaks
4001	-	4040	Lime w/shale
4040	-	4103	Kansas City Lime
4103	-	4151	Lime
4151	-	4202	Lime
4202	-	4252	Lime
4252	-	4287	Lime
4287	-	4356	Lime
4356	-	4412	Lime
4412	-	4434	Lime & Shale
4434	-	4483	Lime & Shale Streaks
4483	-	4484	Lime & Shale
4484	-	4517	Lime & Shale
4517	-	4562	Lime & Shale
4562	-	4571	Lime & Sand
4571	-	4590	Lime
4590	-	4610	Lime - Dolomite
4610	-	4673	Mississippi
4673	-	4690	T.D.

JAN 15 1963

CONSERVATION DIV
Wichita, Kansas


I, George R. Jones, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Wheatcroft, C NE NW, Sec. 36-17S-28W, Lane County, Kansas, as reflected by the files of Jones-Gebert Oil, Inc.


George R. Jones

State of Kansas - County of Sedgwick) ss.

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County Kansas, this 11th day of January, 1963.

My Commission expires:
February 1, 1964.


Barbara J. Layton