


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

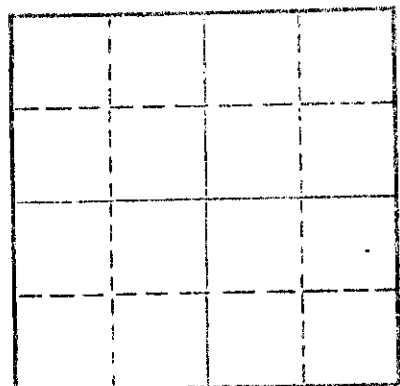

Locate well correctly on above
Section Plat

Butler County, Sec 31 Twp 26 Rge. 8 (E)E (W)
Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner Lee Phillips Oil Company
Lease Name Drumm Institute Well No. 16
Office Address 1532 Vickers KSB&T Bldg, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed May 6 1972
Application for plugging filed March 28 1974
Application for plugging approved March 29 1974
Plugging commenced April 11 1974
Plugging completed April 13 (April 13) 1974
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Ted E. Dewey
Producing formation Depth to top Bottom Total Depth of Well 2840 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	215'	none
				5 1/2"	2839'	1838.04

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Rig up and dig out cellar. Put a 10' rock bridge at 2725' and added 5 sacks of cement, to plug to bottom. Put a 20' rock bridge at 225' to 205' and added 3 yards of ready-mix cement to plug to surface.

RECEIVED
STATE CORPORATION COMMISSION
APR 17 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor The Buckeye Corporation
Address Box 1020, El Dorado, Kansas 67042


STATE OF KANSAS, COUNTY OF BUTLER, ss.
Charles V. Cross (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 1020, El Dorado, Ks 67042
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of April, 1974

[Signature] Notary Public.

My commission expires



COMPANY: LEE PHILLIPS OIL CO.
CONTRACTOR: GROVE DRILLING CO., INC.

FARM: DRUM INSTITUTE NO. 16
LOCATION: SW/4 NW/4 SE/4
Sec. 31-26-8E
Butler County, Kansas

COMMENCED: May 1, 1972
COMPLETED: May 6, 1972 (Rotary)

CASING RECORD:
8 5/8" set at 215 feet w/85 sacks
5 1/2" set at 2840 feet w/80 sacks

272A

<u>FORMATIONS</u>	<u>DEPTH</u>
Lime and shale	1860'
Sand, shale and shells	1785'
Shale	1750'
Lansing lime	1938'
Shale and lime	2088'
Kansas City Lime	2250'
Shale and lime	2707'
Bartlesville sand	2739'
Shale	2817'
Mississippi Lime	2840'
TOTAL DEPTH	2840'

RECEIVED
STATE CORPORATION COMMISSION
MAR 29 1974
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify this to be a true and accurate log of the above described well as shown by the Daily Drilling Reports.

GROVE DRILLING COMPANY, INC.

J. Solerome

Subscribed and sworn to before me this 9th day of May, 1972.

Ernest W. ...
Notary Public

My commission expires June 21, 1974