


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

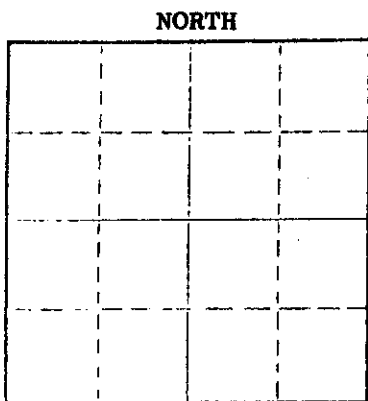

Locate well correctly on above Section Plat

Butler County, Sec. 31 Twp. 26 Rge. 8 (E) E (W)
Location as "NE/CNWxSWx" or footage from lines SW/c
Lease Owner Lee Phillips Oil Company
Lease Name Drumm Well No. 5
Office Address 125 N. Market - Suite 1532, Wichita, Ks 67202
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed February 1 19 70
Application for plugging filed November 6 19 75
Application for plugging approved November 7 19 75
Plugging commenced November 12 19 75
Plugging completed November 14 19 75
Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Ted E. Dewey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2807 feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	140	none
				5 1/2"	2804	1382.98'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Move in, rig up, dig out cellar. Put 15' rock bridge at 2625' and added 5 sacks of cement to plug bottom. Set a 20' rock bridge at 220' to 200' and added 4 yards of ready-mix cement to plug to surface.

RECEIVED
STATE CORPORATION COMMISSION

NOV 19 1975

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor THE BUCKEYE CORPORATION
Address BOX 1020, EL DORADO, KS 67042
CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS COUNTY OF BUTLER
Charles V. Cross (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 1020, El Dorado, Ks 67042 (Address)

Subscribed and sworn to before me this 18th day of November 19 75

My commission expires [Stamp: ISA L. FISHER, Butler County, Ks, My Comm. Exp. June 20, 1979]

[Signature] Notary Public.

STATE NOTARY PUBLIC
ISA L. FISHER
Butler County, Ks.
My Comm. Exp. June 20, 1979

COMPANY: LEW PHILLIPS OIL CO.
CONTRACTOR: CROWE DRILLING CO., INC.

FAIR: DRUM NO. 5
LOCATION: SW/4 Lot 1, Sec. 31-268-8E
Butler County, Kansas

COMMENCED: January 27, 1970
COMPLETED: February 1, 1970 (Rotary)

CASING RECORD:
149 feet of 8 5/8" set w/115 sacks
5 1/2" set at ~~2807' w/75 sacks~~
2804' w/80 sacks

<u>FORMATIONS</u>	<u>DEPTH</u>	
Surface Hole	150'	
Lime	435'	
Lime and shale	920'	
Lime	980'	
Shale and lime	1720'	
Lime	1940'	Perf. 2672-2712 w/2 shots per foot.
Shale	2044'	Perf. 2676-2710 w/16 shots per ft.
Lime, KC	2806'	
Shale	2340'	
Shale and lime	2595'	
Shale	2664'	
Sand	2744'	
Shale	2784'	
Mississippi Lime	2807'	
TOTAL DEPTH	2807'	

I hereby certify this to be a true and accurate log of the above described well as shown by the Daily Drilling Reports.

CROWE DRILLING COMPANY, INC.

By *J. Holser*

Subscribed and sworn to before me this 10th day of February, 1970.

Emy Dominick
Notary Public

My commission expires June 21, 1970