

15-191-00144-0000


Form CP-4

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Sumner County, Sec. 12 Twp. 31 Rge. 2 W (E) (W) X  
Location as "NE/CNW%SW%" or footage from lines C E/2 SE NW

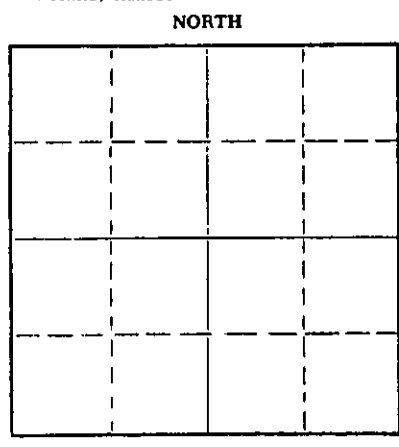

Lease Owner Beardmore Drilling Company  
Lease Name Haines Well No. 1  
Office Address Suite 700 120 Bldg. 120 S. Market Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed 6-6-68 19\_\_\_\_  
Application for plugging approved 6-7-68 19\_\_\_\_  
Plugging commenced 6-7-68 19\_\_\_\_  
Plugging completed 6-10-68 19\_\_\_\_  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Howard Hess  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3800 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	393	None
				5 1/2	None	3109

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Cleaned out cellar. Sanded to 3760'. Dumped 5 sacks of cement.  
Rigging up. Working pipe.  
Working pipe. Shot pipe at 3500' - 3300' and 3115'.  
Working pipe. Pulling pipe.  
Pulling pipe. Plugging well. Set rock bridge at 250' with 20 sacks of cement. Mudded hole and rockbridge. Capped well with 5 sacks of cement.

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 12 1968  
CONSERVATION DIVISION  
Wichita, Kansas

(if additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Forbes Casing Pulling, Inc.  
Address P. O. Box 221 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes  
P. O. Box 221 Great Bend, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 11 day of June, 1968

My commission expires May 27, 1969  
[Signature] Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


15-191-00144-000

Company: JONES-GEBERT OIL, INC.,  
Farm: Raines No. 1  
H

SEC. 12 T. 31 R. 2W  
C E/2 SE NW

Total Depth. 3800'  
Comm. 5-27-61 Comp. 6-8-61  
Shot or Treated.  
Contractor. Jones-Gebert Oil  
Issued. 10-21-61

County Sumner  
KANSAS



Elevation. 1318' RB

Production. 19 BOPD

CASING:  
8 5/8" 393' cem w/250 sx.  
5 1/2" 3799' cem w/50 sx.

Figures Indicate Bottom of Formations.

surface clay	20
shale	60
sand & shale	60
shale & lime	735
lime & shale	915
shale w/lime strks	1150
lime & shale strks	1340
lime w/shale strks	1610
shale & lime	2035
lime w/shale strks	2215
lime w/shale	2535
lime w/shale strks	2640
shale & lime	2770
lime & shale	2985
shale w/lime	3093
lime	3340
shale w/lime strks	3350
shale & lime	3445
shale & lime strks	3500
lime w/shale	3538
shale & lime	3756
Core #1	3772
Core #2	3782
lime & shale	3795
lime	3800 KTD
Total Depth	

TOPS: SCOUT	
Elmont	1725
Topeka	2035
Heebner	2460
Kansas City	3083
Base Kansas City	3340
Cherokee	3597
Mississippi	3752
Mississippi Dolomite	3756

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 7 1968  
CONSERVATION DIVISION  
Wichita, Kansas