


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

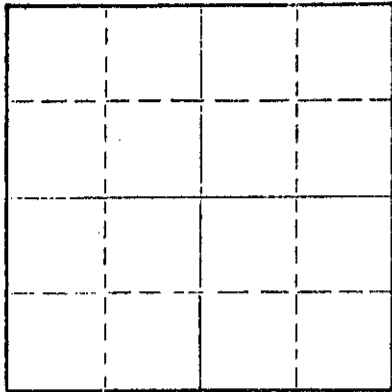

Locate well correctly on above
Section Plat

Harper County, Sec. 20 Twp. 31 Rge. 7 (E) (W) A
Location as "NE/CNW&SW" or footage from lines SW/SE/SE
Lease Owner Continental Oil Company
Lease Name HUDSON Well No. 4
Office Address P. O. Box 1051 Pratt, Kansas 67124
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced March 22, 1973
Plugging completed March 27, 1973
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4765 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	271	None
				5 1/2	4762	3043.98'


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Measured T.D. at 4700 ft. Dumped sand to 4650' and 5 sacks cement. Shot casing at 3400, 3200, 3100 and 3030 ft. pulled 96 joints of 5 1/2" casing. Built a rock bridge at 250' and dumped 4 yards readymix concrete.

RECEIVED
STATE CORPORATION COMMISSION
MAR 29 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698 Great Bend, Kansas 67530

STATE OF KANSAS COUNTY OF BARTON ss.
JAMES W. ROCKHOLD (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
James W. Rockhold
Box 698 Gt. Bend, Ks. 67530
(Address)

Subscribed and sworn to before me this 28th day of March, 1973

Cathy Miller
Cathy Miller Notary Public.

AEA

DRILLERS' LOG

Well Owner: Continental Oil Company
 Farm Name: T. S. Hudson Well No. 4
 Commenced: 4/21/59
 Completed: 5/9/59
 Total Depth: 4735'
 Casing: 8 5/8" @ 271' cemented
 5 1/2" @ 4734' cemented
 Contractor: Peel Brothers, Inc.

330' SL, 990' EL
Sec. 20-31S-7W

Harper County, Kansas

Elevation:

Production:

Figures below indicate bottoms of formations:

Sand & clay	0 -	40
Shale & shells		155
Red bed		272
Shale		870
Shale & shells		1320
Shale & lime		3825
Lime		4140
Lime & shale		4334
Miss. lime & chert		4519
Miss. lime		4544
Shale & lime		4657
Simpson sand		4735
Total Depth		4735

RECEIVED
 STATE CORPORATION COMMISSION
 FEB 14 1973
 CONSERVATION DIVISION
 Wichita, Kansas

This is to certify that the above information is to the best of our knowledge, true and correct.

PEEL BROTHERS, INC.

BY *Jack W. Martin*

SUBSCRIBED AND SWORN to before me this 11th day of May, 1959

My commission expires: April 27, 1960

Rich Brant
Notary Public



KANSAS GEOLOGICAL SOCIETY
DWM
PSL
FILE (2)