


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

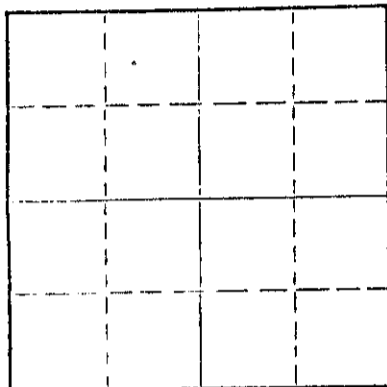

Locate well correctly on above
Section Plat

Summer

County, Sec. 13 Twp. 32 Rge. 4W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SE SW

Lease Owner EL DORADO SUPPLY COMPANY

Lease Name Altman Well No. 1

Office Address 764 Oil Hill Road, El Dorado, KS 67042

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed July 16 19 74

Application for plugging filed May 7 19 74

Application for plugging approved May 7 19 74

Plugging commenced July 9 19 74

Plugging completed July 16 19 74

Reason for abandonment of well or producing formation Non-Commercial

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eugene H. Graham, Winfield, KS 67156

Producing formation Depth to top Bottom Total Depth of Well 3100 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	254'	0
				5 1/2	3100'	1,999.51'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3100 feet to 3060 feet for each plug set.

July 9 - Dumped 5 sacks cement from 3100' to 3060'.

July 16 - Made rock bridge from 275 to 260'. Dumped 4 1/2 yd. ready-mix from 260' to base.

RECEIVED
STATE CORPORATION COMMISSION

JUL 30 1974

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor EL DORADO SUPPLY COMPANY
Address 764 Oil Hill Road, El Dorado, KS 67042

STATE OF Kansas, COUNTY OF ~~Butler~~ Butler, ss.
Orval L. North


(If additional description is necessary, use BACK of this sheet)
I, the undersigned, being duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Orval L. North - *Orval L. North*
764 Oil Hill Rd., El Dorado, KS 67042
(Address)

Subscribed and sworn to before me this 29th day of July, 1974

February 12, 1978

Debra A. Brownrigg
Debra A. Brownrigg Notary Public.



NOV 8 1969

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG

ALTMAN #1
C SE SW Section 13-32S-4W.
Sumner County, Kansas

Commenced: August 29, 1969
Completed: Sept. 14, 1969

Dry

OPERATOR - Atlas Minerals Division of Atlas Corporation

DEPTH		FORMATION	REMARKS
From	To		
0	30	Sand	
30	254	Red bed and shells	Ran 6 joints of 8-5/8" casing, set @ 254' w/225 sacks cement.
254	770	Shale and shells	
770	3338	Shale and lime	National Devel. OWWO
3338	3550	Lime	5 1/2 2073' 225 Sx
3550	3845	Lime and shale	Washed down 3100
3845	4264	Lime	
4264	4268	Shale	
4268	4361	Shale and lime	
4361	4376	Simpson Sand	
4376	TD		Dry and abandoned.

I, E. E. HALL, certify this is a correct copy of the Drillers' Log for the well drilled in the C SE SW, Section 13-32S-4W, Sumner County, Kansas, to the best of my knowledge and belief.

E. E. Hall

E. E. HALL

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 22 day of September, 1969, personally appeared E. E. Hall to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.

Barbara J. Layton
Barbara J. Layton, Notary Public



OWWO NATIONAL DEVELOPMENT CO.
Elev. 1231- Temp. Abd.
Log Tops
wh c1 2057
heeb 2650
itat 2983
stal 3003
kc 3278
bck 3534
cher 3732
miss 3939
kh 4274
simp sd 4361
rtd 4376

Completed 11-29-73