


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Harper County, Sec. 36 Twp. 31S Rge. (E) 7 (W)

Location as "NE/CNW/SW" or footage from lines C SW NE  
Lease Owner Aladdin Petroleum Corporation  
Lease Name Seyb-Williams Well No. 2  
Office Address 809 Petroleum Building, Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) oil  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging approved \_\_\_\_\_ 19\_\_\_\_  
Plugging commenced July 19 19 75  
Plugging completed July 24 19 75  
Reason for abandonment of well or producing formation depleted

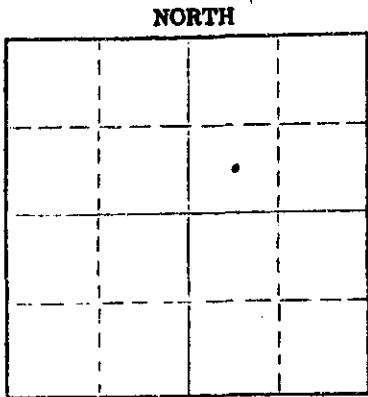

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5132 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
			229'	8 5/8"	229'	none
			4850'	4 1/2"	4850'	4143.07

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Sanded back to 4800' and dumped 4 sacks of cement.

Set 10' rock bridge at 320' and plugged well with 4 1/2 yards of ready mix cement.

RECEIVED  
STATE CORPORATION COMMISSION

JUL 27 1975

Name of Plugging Contractor PIPE PULLERS, INC. (If additional description is necessary, use BACK of this sheet)  
Address Box 128, Ellinwood, Kansas 67526

STATE OF KANSAS COUNTY OF BARTON

Evelyn Roth

(employee of owner) or (owner-co-operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Evelyn Roth

Ellinwood, Kansas

(Address)

Subscribed and Sworn to before me this 30th day of July 19 75

My commission expires \_\_\_\_\_

JENNY KASSELMAN  
NOTARY PUBLIC  
BARTON COUNTY, KANSAS  
MY COMM. EXP. JULY 16, 1978

Jenny Kaselman  
Notary Public

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

SEYB-WILLIAMS #2 (OWDD)  
 C SW NE SECTION 36-31S-7W  
 HARPER COUNTY, KANSAS

OLD INFORMATION: Was MICHAEL C. SEYB #1

OPERATOR - GLEN T. SUMMAR, ET AL  
 SPUD 8-15-62 - SET 8-5/8" CASING @ 229' w/200 SACKS CEMENT.  
 OLD TD 4750' - DRY AND ABANDONED 8-28-62

NEW INFORMATION:

COMMENCED - MARCH 25, 1967  
 COMPLETED - MARCH 30, 1967  
 OPERATOR - ALADDIN PETROLEUM CORPORATION

DEPTH		FORMATION	REMARKS
FROM	To		
0	200	CEMENT AND MUD	
200	4750	MUD	
4750	4780	SAND	
4780	4904	SAND AND SHALE	
4904	5132	LIME	
5132	TD		RAN 147 JOINTS OF 4 1/2" CASING TO 4850' w/125 SACKS CEMENT.

I, E. E. HALL, CERTIFY THIS IS A CORRECT COPY OF THE DRILLERS' LOG FOR THE OLD WELL WASHDOWN AND DEEPENING FOR THE WELL LOCATED C SW NE SECTION 36-31S-7W, HARPER COUNTY, KANSAS, TO THE BEST OF MY KNOWLEDGE AND BELIEF.



E. E. HALL

STATE OF KANSAS            )  
                                   ) SS  
 COUNTY OF SEDGWICK    )

BEFORE ME, THE UNDERSIGNED, A NOTARY PUBLIC WITHIN AND FOR SAID COUNTY AND STATE, ON THIS 10TH DAY OF APRIL, 1967, PERSONALLY APPEARED E. E. HALL, TO ME PERSONALLY KNOWN TO BE THE IDENTICAL PERSON WHO EXECUTED THE WITHIN AND FOREGOING INSTRUMENT AND ACKNOWLEDGED TO ME THAT HE EXECUTED THE SAME AS HIS FREE AND VOLUNTARY ACT AND DEED FOR THE USES AND PURPOSES THEREIN SET FORTH.

IN WITNESS WHEREOF, I HAVE HEREUNTO SET MY HAND AND OFFICIAL SEAL THE DAY AND YEAR LAST ABOVE WRITTEN.

  
 BARBARA J. LAYTON, NOTARY PUBLIC

My COMMISSION EXPIRES FEBRUARY 1, 1968.

JUL 2 1975  
 7-2-75