

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

HARPER

County. Sec. 36 Twp. 31 Rge. 7 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C NE SE

Lease Owner KATHOL PETROLEUM, INC.

Lease Name Haskins Well No. 1

Office Address 900 Sutton Place, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed 5/8 19 69

Application for plugging filed 10/24 19 69

Application for plugging approved 10/27 19 69


Plugging commenced 10/28 19 69

Plugging completed 10/28 19 69

Reason for abandonment of well or producing formation Production not great enough to produce.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

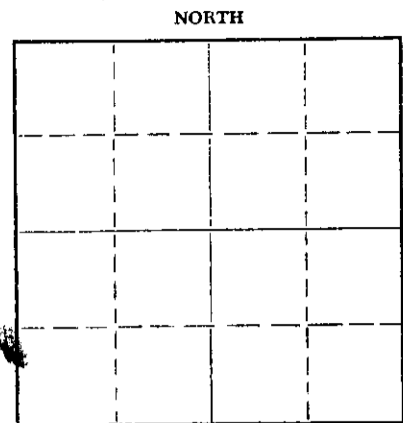

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well R. J. Warren

Producing formation Simpson Depth to top 4699 Bottom 4703 Total Depth of Well 4703 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	216	None
				5 1/2	4701	3525

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug at 4000' Sand to 3975  
5 sx. cement Rock and mud  
to 300' 20' rock bridge to  
280' 5 sx. cement.

RECEIVED  
STATE CORPORATION COMMISSION  
11-25-69  
NOV 25 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Ralph Comstock Pipe Pulling Inc.

Address 320 N. Park, Stafford, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

I, J. Catt (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) J. Catt

900 Sutton Place, Wichita, Kansas (Address)

SWORN to before me this 21st day of November 19 69

Notary Public. (Signature)

My commission expires June 17, 1972



DRILLERS LOG

NO. 1 HASKIN

KATHOL PETROLEUM, INC.

C NE SE

HARPER COUNTY, KANSAS

Commenced: 4-24-68  
 Completed: 5-8-68 R.T.D.  
 Elevation: 1427' KB

FROM	TO	
0	40	Sand and Shale
40	216	Shale and Lime
216	425	Redbed
425	1097	Redbed and Shale
1097	1135	Anhydrite
1135	1270	Lime and Shale
1097	1470	Shale and Lime
1470	1700	Lime and Shale
1700	1840	Lime
1840	2175	Lime and Shale
2175	2842	Shale and Lime
2842	2995	Lime and Shale
2995	3075	Shale and Sand
3075	3305	Sand and Shale
3305	3490	Shale and Lime
3490	3635	Shale
3635	3775	Shale
3775	4000	Lime
4000	4345	Shale and Lime
4345	4355	Chat
4355	4401	Chert
4401	4450	Lime
4450	4550	Lime and Chert
4550	4568	Chert and Lime
4568	4605	Lime
4605	4695	Lime and Shale
4695	4703	Shale and Sand
4703		Rotary Total Depth

REMARKS:

Set 216' of 8 5/8" surface casing with 200 sacks cement. At 4701' set 5 1/2" pipe with 200 sacks of cement.

TOPS:

Elgin Sand	3014	(-1587)
Heebner	3175	(-1748)
Lignite	3720	(-2294)
Kansas City	3734	(-2307)
Base/K.C.	3949	(-2522)
Marmaton	4026	(-2601)
Cherokee	4152	(-2775)
Miss.	4330	(-2903)
Kinderhook	4572	(-3045)
*Simpson	4699	(-3274)

\* Sample Top  
 RECEIVED  
 DATE CORPORATION COMMISSION  
 10-27-69  
 OCT 27 1969  
 CONSERVATION DIVISION  
 Wichita, Kansas

I certify to the best of my knowledge and belief, the above represents a true and accurate driller's log record of the captioned well.

*Don D. Shawver*  
 Don D. Shawver

STATE OF KANSAS )  
 COUNTY OF SEDGWICK) SS

Subscribed and sworn to before me this 15th day of May,

*Dixie Lee Graham*  
 Dixie Lee Graham, Notary



Commission Expires: September 12, 1971