

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev. 03/92

RECEIVED

DEC - 8 1998
12-8-98

15-077-19000-0000 WELL PLUGGING APPLICATION FORM
PLEASE TYPE FORM and File ONE Copy

API # Nov. 1961 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR Pickrell Drilling Company, Inc. KCC LICENSE # 5123
(owner/company name) (operator's)

ADDRESS 110 N. Market, Suite 205 CITY Wichita

STATE Kansas ZIP CODE 67202 CONTACT PHONE # (316) 262-8427

LEASE Drake "B" WELL# 3 SEC. 6 T. 31S R. 8 (~~East~~ West)

- NE -NE - SW SPOT LOCATION/0000 COUNTY Harper

2310 FEET (in exact footage) FROM S N (circle one) LINE OF SECTION (NOT Lease Line)

2970 FEET (in exact footage) FROM E W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL D&A SWD/ENHR WELL DOCKET#

CONDUCTOR CASING SIZE SET AT CEMENTED WITH SACKS

SURFACE CASING SIZE 8 5/8 SET AT 236 CEMENTED WITH 200 SACKS

PRODUCTION CASING SIZE 5 1/2 SET AT 4524 CEMENTED WITH 200 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS:

ELEVATION 1688 KB T.D. 4525 PBDT 4488 Heebner ANHYDRITE DEPTH 3444
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR CASING LEAK JUNK IN HOLE

PROPOSED METHOD OF PLUGGING Plug back w/ sand to 4325'. Use dump bailer to spot 5 sx. of cement on sand. Cut and recover casing. Run tubing to 1675 and spot 35 sx. cement. Pull tubing to 975 and spot 35 sx. cement. Pull tubing to 290 and circulate cement to surface.
(If additional space is needed attach separate page)

POOH w/ tubing and refill hole w/ cement.
IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? Yes IS ACO-1 FILED? Yes

If not explain why?

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

Ron Smith PHONE# (316) 532-3511
ADDRESS 2845 S. State Rd. 14 City/State Kingman, KS 67068-8629

PLUGGING CONTRACTOR Clark Corporation KCC LICENSE # 5105
(company name) (contractor's)

ADDRESS P.O. Box 187 Medicine Lodge, KS 67104 PHONE # (316) 886-5665

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) 12-15-98

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 12-07-98 AUTHORIZED OPERATOR/AGENT: Jack Gurley
(signature)
Jack Gurley

6/99


6/99

BAKER SERVICE TOOLS - TALLY PAD

15-077-19000-0000

New Completion Workover

Oil Company _____ Well No. 3 Field _____ Lease Drake B
Company Man _____ Date Drilled 11/61 County Harper State Kansas

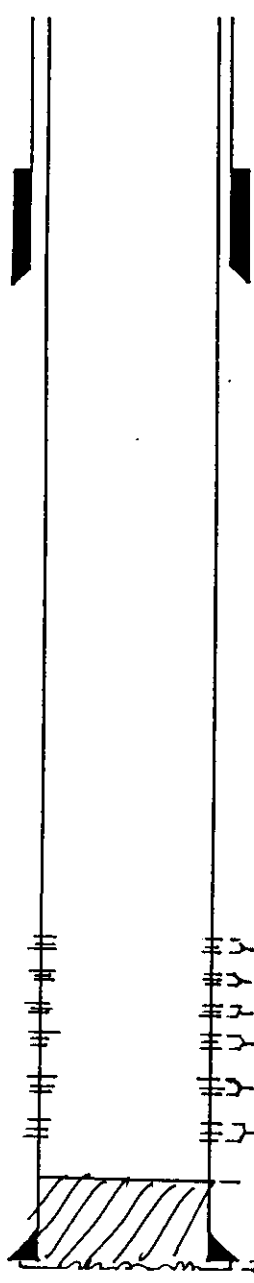

— 236 Base 8 7/8" 36# J-55 w/200 Sx P02

Well has a casing leak. FL stays at approx 2730' to 2820' from the surface.

≡ J-4393-4399 }
≡ J-4420-4430 } 7/78
≡ J-4434-4442 }
≡ J-4445-4449 }
≡ J-4454-4465 (11/73)
≡ J-4472-4482 (12/61)

4488 PBD

— 4524 Base 5 1/2" 15.5# J-55 w/150 Sx P02 plus 50 Sx Latex
— 4525 RTD

REMARKS:

- (1) Acidized perfs 4472-4482 w/500 gal. MA (12/61)
- (2) Frac both ^{lower} zones w/40.57 BTF w/100 ball sealers at ave 41 BPM (No Sand), (11/73)
- (3) Frac all perfs w/370000 lb sd/40000 GSW 56 BPM

RECEIVED
STATE REGISTRATION DIVISION
CONSERVATION DIVISION
Winifred, Kansas
DEC - 8 1998
12-8-98

STATE REGISTRATION DIVISION



Kansas Corporation Commission

Bill Graves, Governor John Wine, Chair Susan M. Seltsam, Commissioner Cynthia L. Claus, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

December 9, 1998

Pickrell Drilling Company, Inc.
110 N. Market, Suite 205
Wichita, Ks. 67202

Drake B #3
API 15-07719000 - 0000
NE NE SW
Sec. 6-31S-8W
Harper County

Dear Ron Smith,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,

David P. Williams
Production Supervisor

District: #2
130 S. Market Room 2125
Wichita KS 67202-3208
(316) 337-6231