



# B.P.C. WELL PLUGGING

P.O. BOX 282  
 BURDEN, KS 67019 # 27

**JAMES R. BRADEN**  
 HOME # 620-438-2856 MOBILE # 620-222-1252

DATE	INVOICE #
9/2/2003	03/344

**BILL TO**  
 SUERTE OIL CO.  
 P.O. BOX 275  
 HOWARD, KS 67349

**JOB LOCATION**  
 DUNKLEBERGER # 7

**TERMS 30 DAYS**  
 Charge of 1.8% on due accounts

DATE	ITEM	DESCRIPTION	AMOUNT
8/11/2003		MOVED RIG IN ON LOCATION. MOVED STUFF OF LOCATION. RIGGED UP TO PULL TUBING. RELEASED PACKER PULLED 1 JT.	
8/12/2003		LAYED OUT SEAL TITE TUBING, PULLED INSERTS USED THREAD PROTECTORS. RIGGED UP TO PLUG BOTTOM. SANDED BACK TO 1116'.	
8/13/2003		DUMPED 9 SX. CEMENT ON TOP OF SAND. DUG OUT CELLAR. CUT CLAMP FROM 7" PIPE. 7" CEMENTED IN.	
	RIG TIME RIG UP CHARGE	3 HRS. @ \$90.00 PER HR.	270.00T 1,000.00T

<b>Thank you for your business.</b>	<b>SUBTOTAL</b>	\$1,270.00
	<b>SALES TAX (5.3%)</b>	\$67.31
	<b>BALANCE DUE</b>	<b>\$1,337.31</b>

RECEIVED  
 KANSAS CORPORATION COMMISSION

APR 05 2013

CONSERVATION DIVISION  
 WICHITA, KS

# B.P.C. WELL PLUGGING

P.O. BOX 282  
BURDEN, KS 67019

#27

**JAMES R. BRADEN**  
HOME # 620-438-2856 MOBILE # 620-222-1252

DATE	INVOICE #
9/2/2003	03/346

**BILL TO**  
SUERTE OIL CO.  
P.O. BOX 275  
HOWARD, KS 67349

**JOB LOCATION**  
DUNKLEBERGER #67

**TERMS 30 DAYS**  
Charge of 1.8% on due accounts

DATE	ITEM	DESCRIPTION	AMOUNT
8/27/2003		DUG CIRCULATING PIT FOR CEMENT JOB. LOADED WATER TRUCK WITH FRESH WATER. MOVED IN ON LOCATION, RIGGED UP TO PUMP CEMENT. RUN POLY IN TO 450'. PUMPED CEMENT DOWN POLY, FILLED TO SURFACE. PULLED OUT POLY, TOPPED OFF WITH CEMENT. WASHED UP, RIGGED DOWN.	
	CEMENT	100 SACKS- 4% GEL @ \$6.00 PER SACK	600.00T
	PUMP CHARGE	3 HRS @ \$75.00 PER HR.	225.00T
	BULK TANK	\$50.00 PER JOB	50.00T
	WATER TRUCK	3 HRS. @ \$45.00 PER HR.	135.00T
	BACK HOE	2 HRS. @ \$45.00 PER HR.	90.00T

<b>Thank you for your business.</b>	<b>SUBTOTAL</b>	\$1,100.00
	<b>SALES TAX (5.3%)</b>	\$58.30
	<b>BALANCE DUE</b>	<b>\$1,158.30</b>

RECEIVED  
KANSAS CORPORATION COMMISSION

APR 05 2013


CONSERVATION DIVISION  
WICHITA, KS

Dunkleberger Lease, EK CO.; NW Sec 34 - T29S - R10E



**Legend**

- Active Oil Well
- Abandoned Oil Well
- ⊗ Oil Well Plugged New
- ⊘ Oil Well Plugged Old
- ▲ Active Injection Well
- △ Abandoned Injection Well
- ⊗ Injection Well Plugged New
- ⊘ Injection Well Plugged Old
- Active Gas Well
- Abandoned Gas Well
- ⊗ Gas Well Plugged New
- ⊘ Gas Well Plugged old
- ⊗ Possible Well Location
- ⊕ Tank Battery
- Emergency Pit
- ⊗ Closed Emergency Pit
- Monitoring Well

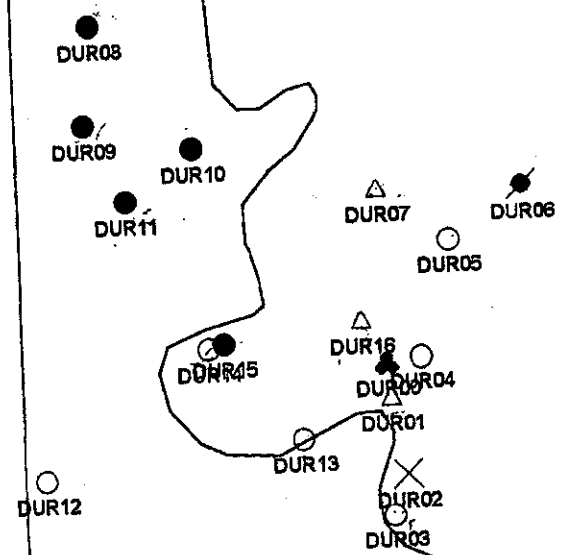

RECEIVED  
KANSAS CORPORATION COMMISSION

APR 05 2013

CONSERVATION DIVISION  
WICHITA, KS

0.5 Miles



Compiled 05/18/2000

**Dunkleberger Lease**

<b><u>Session Pt.</u></b>	<b><u>Attribute</u></b>	<b><u>Section</u></b>	<b><u>Twnshp</u></b>	<b><u>Range</u></b>	<b><u>FSL</u></b>	<b><u>FEL</u></b>	<b><u>County</u></b>	<b><u>Casing, etc.</u></b>
DUR00	TANK	34	29	10	3495	3655	EK	TANKS
DUR01	INJ-AB	34	29	10	3339	3636	EK	7S
DUR02	PWL	34	29	10	3009	3573	EK	PWL
DUR03	OIL-AB	34	29	10	2820	3636	EK	7P
DUR04	OIL-AB	34	29	10	3523	3502	EK	13S
DUR05	OIL-AB	34	29	10	4037	3366	EK	5.5P2P-RODS
DUR06	OIL-PO	34	29	10	4277	3026	EK	PWL
DUR07	INJ-AB	34	29	10	4265	3683	EK	7S2.78P
DUR08	OIL-AC	34	29	10	5023	4945	EK	5.3P2P-RODS
DUR09	OIL-AC	34	29	10	4581	4983	EK	4.5P2P-RODS
DUR10	OIL-AC	34	29	10	4469	4498	EK	4.5P2P-RODS
DUR11	OIL-AC	34	29	10	4238	4803	EK	5.5P2.78P-RD
DUR12	OIL-AB	34	29	10	3013	5196	EK	4.5P
DUR13	OIL-AB	34	29	10	3170	4036	EK	4.5P
DUR14	OIL-AB	34	29	10	3576	4449	EK	5.5P
DUR15	OIL-AC	34	29	10	3595	4381	EK	6.5P2P-RODS
DUR16	INJ-AB	34	29	10	3681	3767	EK	6S3P

RECEIVED  
KANSAS CORPORATION COMMISSION

APR 05 2013

CONSERVATION DIVISION  
WICHITA, KS

STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 200 Colorado Derby Building  
 Wichita, Kansas 67202

WELL PLUGGING RECORD  
 K.A.R.-82-3-117

API NUMBER Comp in 1937

LEASE NAME Dunkleberger

WELL NUMBER 6

3630 Ft. from S Section Line

3300 Ft. from E Section Line

SEC. 34 TWP. 29 RGE. 10 (E) or (W)

COUNTY Elk

Date Well Completed 6-8-37

Plugging Commenced 8-11-03

Plugging Completed 8-27-03

TYPE OR PRINT  
 NOTICE: Fill out completely  
 and return to Cons. Div.  
 office within 30 days.

LEASE OPERATOR Suerte Oil Co.

ADDRESS Box 725, Howard, ks 67349

PHONE (620) 374-2002 OPERATORS LICENSE NO. 5177

Character of Well SWW

(Oil, Gas, D&A, SHD, Input, Water Supply Well)

The plugging proposal was approved on 8-4-03 (date)

by Mr. Ron Rowe (KCC District Agent's Name).

Is ACO-1 filed? No If not, is well log attached? No - No Log Available

Producing Formation Redd Depth to Top 1291' Bottom 1318' T.D. 1318'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
<u>K.C.</u>	<u>wt.</u>	<u>1181</u>	<u>1291</u>	<u>7</u>	<u>1291</u>	<u>0</u>
<u>Redd</u>	<u>oil</u>	<u>1286</u>	<u>1318</u>			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from feet to feet each set sanded back to 1116' and dumped 9 5/8" cem. on top of 3" 7" cas.  
Cemented in Ran 1" to 450' circulated cem. to surface and pulled  
1" topped off w/ cem. 9 5/8" cas. w/ 4% gel

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Braden Pet. & Well Plugging Co. License No. 32475

Address Box 282, Burden, ks 67019

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Suerte Oil Co.

STATE OF ks. COUNTY OF Elk, ss.

Maurice Perkins (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained and the log of the above-described well as filed the the same are true and correct, so help me God.

(Signature) Maurice Perkins

(Address) PO Box 725 Howard, ks 67349

JACQUELINE PERKINS  
 NOTARY PUBLIC  
 STATE OF KANSAS  
 My Appt. Exp. 2-8-2009

SUBSCRIBED AND SWORN TO before me this 26<sup>th</sup> day of September, 2003

Jacqueline Perkins  
 Notary Public

My Commission Expires: 2-8-2009

RECEIVED  
 KANSAS CORPORATION COMMISSION

APR 05 2013

CONSERVATION DIVISION  
 WICHITA, KS