

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Harper County, Sec. 31 Twp. 31 Rge. 6 W (E) (W)

Location as "NE/CNWxSWx" or footage from lines C NE NW

Lease Owner Jones-Gebert Oil Co.

Lease Name Keller Well No. 1

Office Address 1007 Central Building

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed November 15, 1962 19

Application for plugging filed November 19 1962

Application for plugging approved November 19 1962

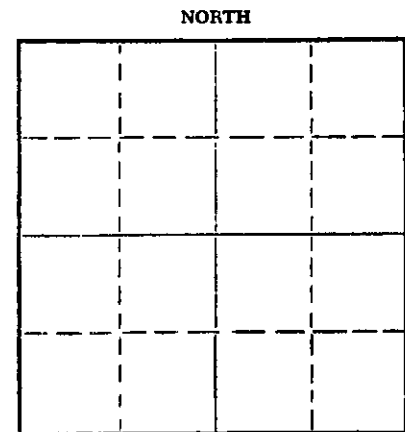
Plugging commenced November 19 1962

Plugging completed November 19 1962

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Herman E. Justus

Producing formation Depth to top Bottom Total Depth of Well 4760 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	200'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug @ 195' with 1 sack hulls and 25 sks. cement, mud to 35', set top plug @ 35' with 1 sk. hulls and 10 sks. cement.

RECEIVED
STATE CORPORATION COMMISSION

NOV 27 1962
H-27-62
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Jones-Gebert Oil, Inc.

Address 1007 Central Building, Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

George R. Jones (owner or operator) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God

(Signature) *George R. Jones*

1007 Central Building, Wichita, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 19th day of November 1962

Barbara J. Layton
Barbara J. Layton Notary Public.

My commission expires February 1, 1964




DRILLER'S LOG

Company: Jones-Gebert Oil Co.
 Contractor: Jones-Gebert Oil, Inc.
 Farm: #1 Keller
 C NE NW, Sec. 31-31S-6W
 Harper County, Kansas
 Commenced: 11/3/62
 Completed: 11/15/62
 Casing: 200' of 8-5/8" w/175 sxs.

0	-	20	Rock
20	-	60	Sand
60	-	200	Red Bed
200	-	400	Red Bed
400	-	930	Shale & Shells
930	-	1280	Shale & Lime
1280	-	1470	Shale - Lime
1470	-	1675	Lime - Shale
1675	-	1840	Lime - Shale
1840	-	2055	Lime- Shale
2055	-	2295	Shale & Lime
2295	-	2545	Shale & Lime
2545	-	2780	Shale - Lime
2780	-	2785	Shale & Lime
2785	-	2930	Shale & Lime
2930	-	3140	Shale - Lime
3140	-	3280	Lime & Shale
3280	-	3480	Shale & Lime
3480	-	3550	Shale - Lime
3550	-	3620	Sand - Shale
3620	-	3670	Shale - Lime
3670	-	3785	Shale & Lime
3785	-	3860	Lime
3860	-	3900	Lime
3900	-	3965	Lime
3965	-	4055	Lime & Shale
4055	-	4097	Lime
4097	-	4200	Lime & Shale
4200	-	4295	Lime & Shale
4295	-	4352	Lime
4352	-	4465	Chert & Lime
4465	-	4590	Lime
4590	-	4630	Lime & Shale
4630	-	4665	Shale & Lime
4665	-	4686	Shale & Lime
4686	-	4710	Lime & Shale
4710	-	4720	Shale & Lime
4720	-	4756	Shale - Lime
4756	-	4760	Simpson
4760	-		T.D.

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 27 1962
 11-27-62
 CONSERVATION DIVISION
 Wichita, Kansas


I, George R. Jones, do hereby certify that the above and foregoing is a true and correct copy of the log of the #1 Keller, C NE NW, Sec. 31-31S-6W, Harper County, Kansas, as reflected by the files of Jones-Gebert Oil, Inc.


 George R. Jones

State of Kansas)
 County of Sedgwick) ss.

Subscribed and sworn to before me, a Notary Public, in and for Sedgwick County, Kansas this 19th day of November, 1962.

My Commission expires:
 February 1, 1964.


 Barbara J. Layton, Notary Public