
KANSAS

Form CP-3 Rev. 6-26-62

J. P. Roberts Administrator 500 Insurance Building Wichita 2, Kansas

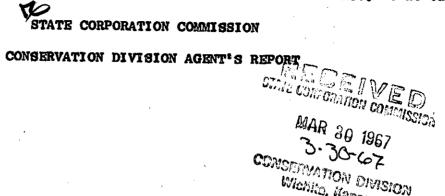

Operator's Full Name	Carl W. Boxbe	erger	Wienito,	ON DIVISION Kansas
	P. O. Box 474			
Lease Name_		Well		
Location SE NE	NW			16 (E) (W) X
County Rus	h	Total De		
Abandoned Oil Well X	Gas Well In		. —	
Other well as hereaft		_	,	
Plugging Contractor:	Forbes Casi	ing Pulling		
Address:	Great Bond, Kansas		Lice	ense No. 49
Operation Completed:	Hour 10 A Day 28			
The Above well was plu				
Total Depth 3510 7	8 5/8 csg set at 950	• ewe 450 se.		.,
4 ½ csg set at 3510° c	ow 200 sc cement.			
Pushed plug to 3500° a	and dumped 4 sc cement	with dump bails	er.	
Recov. 745° of 4 ½ csg	G. 4			
Set 10' bock bridge at	745° and dumped 3 sc	cement.		
Mud to 400° Set 10° ro	ock bridge and 10 sc c	ement.		
Filled to surface with	n 6. yds readymix cemen	t		
				•
hereby certify that	the above well was ni	noved se haroin	atoted	
				~m
1 N 1	VOICED	Signed	- 	gging Supervisor
	3/2-114			- •

INV. NO. __