

STATE OF KANSAS
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

Harper County. Sec. 10 Twp. 31 Rge. (E) 8 (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines. Center SE SE SE
Lease Owner Lion Oil Company
Lease Name Muir-Leeper Well No. One
Office Address P. O. Box 552, Pratt, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry hole
Date well completed 5-9- 19 46
Application for plugging filed 9-25- 19 46
Application for plugging approved 9-25- 19 46
Plugging commenced 9-25- 19 46
Plugging completed 9-29- 19 46
Reason for abandonment of well or producing formation Dry hole
If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes



Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well 5051 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	522	None
				5-1/2"	4480	3002'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud to 4385' and set bridging plug with 6 sacks of cement.
Mud to 250' and set bridging plug with 15 sacks of cement.
Mud to 15' and run 5 sacks of cement.

10-31-84
75-28

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Vernon Hayes
Address P. O. Box 552
Pratt, Kansas

STATE OF Kansas COUNTY OF Pratt, ES.
Vernon Hayes (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Vernon Hayes
P. O. Box 552, Pratt, Kansas (Address)

SUBSCRIBED AND SWORN to before me this tenth day of October 19 46

Mabel Apline Notary Public.

My commission expires July 1-1950

Lion Oil Refining Company
El Dorado, Arkansas

Muir Well No. 1

Center SW/4 SE/4 SE/4
Sec. 10-31S-8W
Harper County, Kansas

Contractor: The R. W. Rine Drilling Company
Commenced: March 19, 1945

Completed: May 9, 1945


	<u>LOG</u>
Clay	0- 25
Shale & Sand	25- 100
Red Shale	100- 260
Shale & Shells	260- 440
Red Bed	440- 522
Shale	522- 625
Red Bed	625- 698
Shale	698-1350
Lime	1350-1475
Lime & Shale	1475-1805
Shale	1805-1870
Lime	1870-2010
Lime & Shale	2010-2160
Shale	2160-2550
Lime	2550-2580
Shale	2580-2725
Lime & Shale	2725-2850
Shale	2850-2880
Lime	2880-2940
Shale	2940-3075
Lime & Shale	3075-3256
Lime	3256-3300
Shale & Lime	3300-3522
Lime	3522-3586
Shale	3586-3688
Shale & Shells	3688-3760
Lime & Shale	3760-3962
Lime	3962-3977
Lime & Shale	3977-4016
Lime	4016-4232
Lime & Shale	4232-4300
Lime	4300-4577
Lime & Shale	4577-4712
Shale	4712-4756
Lime & Chert	4756-4823
Lime & Shale	4823-4888
Lime	4888-4911
Lime & Shale	4911-4965
Lime	4965-5051

8 5/8" casing cemented @ 322'

5 1/2" casing cemented @ 4480'

Total Depth 5051'

10 31 SW
75 28

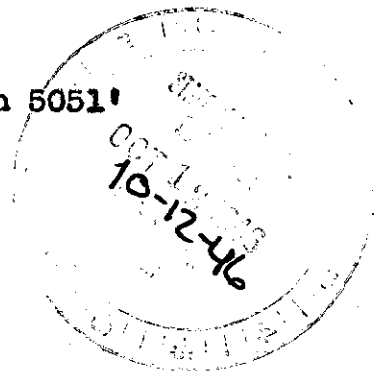

State of Kansas) ss
County of Barton)

I, Clyde W. Goddard, to hereby certify that the above is a true and complete log of the Muir Well No. 1, located in the center of the SW/4 of the SE/4 of the SE/4, Section 10-31S-8W, Harper County, Kansas.

Clyde W. Goddard

Sworn to and subscribed before me this 12th day of May, 1945.

Allen G. Williams
My commission expires Dec. 6, 1945