


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

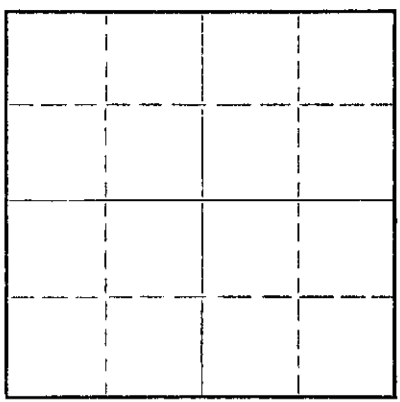

Locate well correctly on above
Section Plat

Harper County. Sec. 35 Twp. 31S Rge. (E) 6 (W)
Location as "NE/CNWxSWx" or footage from lines NE NE SW
Lease Owner Tennessee Gas Transmission Company
Lease Name Henry J. Olivier Well No. 1
Office Address P.O. Box 513 Chase Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 4-21 19 57
Application for plugging filed (Oral) 4-21 19 57
Application for plugging approved (Oral) 4-21 19 57
Plugging commenced 4-21 19 57
Plugging completed 4-21 19 57
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M.A. Rives
Producing formation Depth to top Bottom Total Depth of Well 4836 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	267	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud TD to 250';
Set plug at 250' with 1/2 sack hulls and
20 sacks cement through drill pipe;
Filled hole to 35' w/mud;
Set plug at 35' with 1/2 sack hulls and 10 sacks
cement to base of cellar.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D & M Drilling Co., Inc
Address P.O. Box 247, Great Bend Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
Glen E. Armour (employee of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Glen E. Armour

(Address)

SUBSCRIBED AND SWORN TO before me this 26 day of April 1957

Vincent O. Gray

Notary Public.

My commission expires May 20 1958

PLUGGING
SEC 35 T 31 R 6W
BOOK PAGE 8 LINE 14

RECEIVED
STATE CORPORATION COMMISSION
MAY 1 - 1957
5-157
CONSERVATION DIVISION
Wichita, Kansas

Chair
file

3-1-57

15-077-00173-0000

H. J. OLIVER #1

NE/4 NE/4 SW/4 of Section 35-31E-26W Harper County, Kansas

Rigged up Rotary Tools 3/30/57

Ran 10 Jts. (288,99') 8-5/8" Rd Thd
Surface Pipe set @ 267'. Cemented
w/175 sacks common bulk cement, 2% CC

Tore down Rotary Tools 4/21/57

FORMATION	FROM	TO
Redbed & sand	0'	360'
Shale	160	220
Redbed, shale & shells	220	570
Shale & shells	570	975
Anhydrite	975	990
Shale & lime	990	1069
Shale & shells	1069	1200
Lime & shale	1200	1600
Lime	1600	1700
Lime & shale	1700	2080
Shale w/lime streaks	2080	2350
Shale & lime	2350	2955
Shale w/lime streaks	2955	3045
Shale & lime	3045	3356
Shale	3356	3475
Lime	3475	3520
Shale & lime	3520	3699
Lime	3699	3747
Lime & chert	3747	3766
Lime	3766	3863
Lime & shale	3863	4071
Shale	4071	4105
Lime & shale	4105	4205
Shale, chert & sand	4205	4247
Chert & Lime	4247	4252
Lime	4252	4256
Lime & chert	4256	4285
Lime, shale & chert	4285	4310
Lime & chert	4310	4402
Hard lime	4402	4432
Lime & chert	4432	4589
Lime, shale & chert	4589	4637
Lime & shale	4637	4667
Shale & sand	4667	4681
Sand	4681	4686
Sand & shale	4686	4768
Sand & lime	4768	4786
Sand & shale	4786	4819
Lime	4819	4836

RECEIVED
CONSERVATION COMMISSION
MAY 1 - 1957
5-1-57
CONSERVATION DIVISION
Wichita, Kansas

I, W. M. Barnett, do hereby certify that the foregoing log is true and correct, to the best of my knowledge and belief.

W. M. Barnett

Subscribed and sworn to before me this 23rd day of April, 1957.

June [Signature]
Notary Public

My commission expires: July 29, 1957

PLUGGING
FILE SEC. 35 T. 31 R. 6W
BOOK PAGE 8 LINE 14