


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

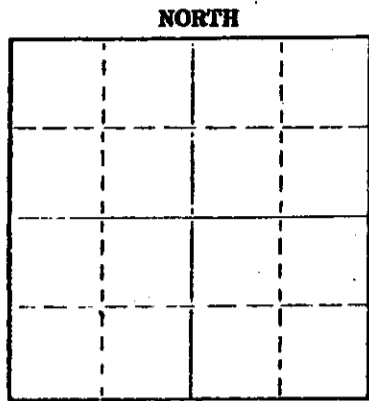

Locate well correctly on above Section Plat

Rush County, Sec 5 Twp 18 Rge 16 (E) (W)X
Location as "NE/CNW/SE/SW" or footage from lines NE/NE/SW
Lease Owner Frontier Oil Co.
Lease Name SCHMIDT Well No. 1
Office Address Box 312, Otis, Kansas 67565
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19__
Application for plugging filed 19__
Application for plugging approved 19__
Plugging commenced January 25, 1975
Plugging completed February 12, 1975
Reason for abandonment of well or producing formation Depleted
If a producing well is abandoned, date of last production 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3555 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	210	-0-
				4 1/2	3553	1968.45

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Great Guns set a plug at 2900'. Dumped 4 sacks cement on plug. Shot casing at 2520'. Spotted 50 bbls. oil. Worked pipe. Spotted 50 bbls. oil. Shot casing at 2300, 2200 and 2010'. Pulled and stripped a total of 60 joints of 4 1/2" casing. Squeezed well with 3 sacks hulls, 20 sacks gel and 120 sacks Pozmix.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Rockhold Engineering, Inc.
Address P. O. Box 698, Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.



(Signature) James W. Rockhold
Box 698, Gt. Bend, Ks. 67530 James W. Rockhold
(Address)

Subscribed and Sworn to before me this 17th day of February, 1975
Cathy Miller Notary Public.
My commission expires September 30, 1975

RECEIVED
STATE CORPORATION COMMISSION
FEB 18 1975
2-18-75
CONSERVATION DIVISION
Wichita, Kansas

RECEIVED
STATE CORPORATION COMMISSION
FEB 18 1975
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

No. 1 Schmidt

CASING RECORD:

8-5/8" @ 222'
w/135 sx. cmt.

4-1/2" @ 3553'
w/275 sx. cmt.

TOTAL DEPTH: 3555'

COMPANY: Frontier Oil Co.

CONTRACTOR: Red Tiger Drilling Co.

COMMENCED: June 19, 1974

COMPLETED: July 2, 1974

DESCRIPTION:

NE NE SW
5-13S-16W
Rush County,
Kansas

ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale w/Iron Pyrite	0	225	
Shale	225	470	
Sand	470	685	
Shale	685	1061	
Anhydrite	1061	1097	
Shale	1097	1660	
Shale & Lime	1660	2148	
Lime	2148	2350	
Lime & Shale	2350	2600	
Shale & Lime	2600	2785	
Shale	2785	3025	
Lime	3025	3555	

RECEIVED
STATE CORPORATION COMMISSION
JUL 21 1975
1-21-75
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda H. Dickens
Linda H. Dickens

Subscribed and sworn to before me this 17th day of July, 1974.

D'Ann Drennan
Notary Public

My Commission Expires:

December 28, 1977

