

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Rush County, Sec. 16 Twp. 18 Rge. 16 (E) (W) X
Location as "NE/CNW/SW" or footage from lines NW NW SW
Lease Owner Leben Oil Corp.
Lease Name Ater Well No. 1
Office Address Box 486 Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 8-13-71 _____ 19____
Plugging completed 8-23-71 _____ 19____
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

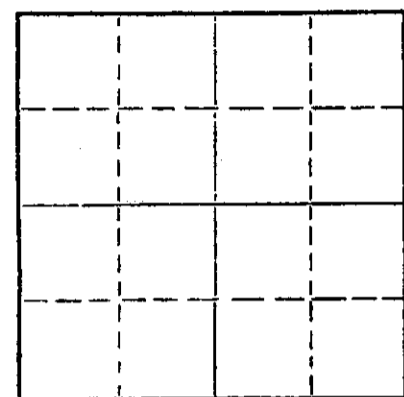

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3479 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	992	None
				5 1/2"	3478	2509.08'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed plug to 3250 ft. Dumped 25 ft. sand and 5 sacks cement on bottom. Shot pipe at 2723' and 2500 ft. Pulled a total of 78 joints of 5 1/2" casing. Sun squeezed down 8 5/8" inch with 3 sacks hulls, 20 sacks gel and 120 sacks 60/40 pozmix cement.

RECEIVED
STATE CORPORATION COMMISSION
AUG 27 1971
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Rockhold Engineering, Inc.
Address Box 698 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
Box 698 Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 26th day of August, 19 71

Elaine Mauck
Notary Public.

My commission expires October 8, 1973



WELL LOG

Company	Leben Drilling, Inc.	Sec. 16 T. 18S R. 16W
Contractor	Leben Drilling, Inc.	Loc. NW NW SW
Farm	Ater #1	County Rush County
Total Depth	3479	Casing 8 5/8" 20# new set @ 992
Commenced	3-1-70	w/ 250 sks 50/50 poz 4% gel 2% cc
Completed	3-11-70	Production w/ 225 sks Common 2% cc
		Producer

Figures Indicate Bottom of Formations

60	Surface Soil, Sand
217	Shale, Sand Stks.
395	Red Bed, Shale
517	Sand
545	Shale
605	Sand
725	Red Bed
975	Shale, Red Bed
1008	Anhydrite
1590	Shale, Shells
2430	Lime, Shale
2760	Shale, Lime
3225	Lime, Shale
3405	Lime
3462	Lime, Shert
3476	Quartzite, Lime
3479	Quartzite
<u>3479</u>	<u>RTD</u>


RECEIVED
STATE CORPORATION COMMISSION
AUG 16 1971
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas)
) SS
County of Barton)

I, James R. Rodgers of the Leben Drilling, Inc.
upon oath state that the above and foregoing is a true and correct copy
of the log of the Ater #1 Well.

James R. Rodgers
James R. Rodgers

Subscribed and sworn to before me this 24th day of March, 1970



Helen L. Lindenmuth
Helen L. Lindenmuth