
Form CP-3 Rev. 6-26-62

KANSAS STATE CORPORATION COMMISSION

J. P. Roberts Assitant Director 500 Insurance Building 212 North Market Wichita 2, Kansas

Well Plugging Authority, issued March 22, 1967.

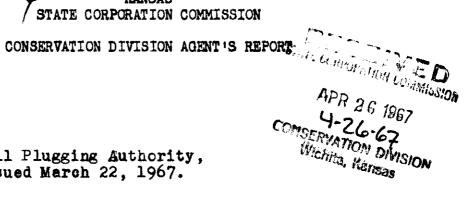

Operator's Full Name Skelly Oil Company
Complete Address: P. O. Box 649, McCook, Nebraska
Lease Name S. O. Bishop Well No. # 5
Location DE NE NE Sec. 19 Twp. 31 Rge. 6 (E) (W) W
County Harper Total Depth 4750
Abandoned Oil Well X Gas Well Input Well SWD Well D & A
Other well as hereafter indicated:
Plugging Contractor: Ralph Comstock Pipe Pulling, Inc.
Address: Stafford, Kansas License No. 490
Operation Completed: Hour 11:00AMDay 25th Month April Year 1967
The Above well was plugged as follows:
592' of 8 5/8" surface pipe, cement circulated. 4750' of 52" long string,
cemented with the top of the cement at 3835'. Top perferation 4743'.
Bettom of the hole was sanded to 4725', and cemented with 20 sacks, through
the dump bailer. 3575' of $5\frac{1}{2}$ " long string was recovered from the hole.
Fluid level in the hole was at 325', bridge plug and rock bridge from
325' to 315', and cemented with 25 sacks. Hole was filled with mud to
40', rock bridge from 40' to 30', and cemented with 10 sacks to the
base of the cellar.
I hereby certify that the above well was plugged as herein stated.
INVOICED Signed: Queling Elving Well Plugging Supervisor
DATE 4/26/67
INV. NO