


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Rush County. Sec. 29 Twp. 17S Rge. 19W E1/4X  
Location as "NE/CNW/SW 1/4" or footage from lines \_\_\_\_\_  
SW NE SW  
Lease Owner Parrish Oil Company  
Lease Name Johnson Well No. 2  
Office Address 120 No. Market, Suite 201, Wichita, Ks.  
Character of Well (Completed as Oil, Gas or Dry Hole) \_\_\_\_\_

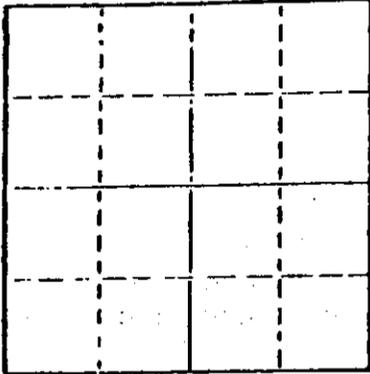

Locate well correctly on above Section Plat

Dry Hole  
Date Well completed February 16, 1977  
Application for plugging filed Verbal Application 19\_\_  
Application for plugging approved Verbal Approval 19\_\_  
Plugging commenced February 16, 1977  
Plugging completed February 16, 1977  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4010'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	259'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy rotary mud from 4,010 ft. (rotary total depth) to 500 ft. Set plug at 500 ft. and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 500 ft. to 240 ft. Set plug at 240 ft. and cemented with 25 sacks cement. Filled hole with heavy rotary mud from 240 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 2 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4-1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Halliburton Services  
410 Union Center Bldg., Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick ss.

Dean Britting, Agent ~~XXXXXX of owner XXXXXXXXXX~~ of the above-described well, being duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting  
200 No. Main, Wichita, Kansas 67202  
(Address)

RECORDED AND SWORN TO before me this 23rd. day of February, 19 77



My commission expires June 30, 1978

Elsie Willison  
Elsie Willison - Notary Public.

KANSAS GEOLOGICAL SOCIETY API NO. - 15-165, 20,619-0000  
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU  
 KANSAS GEOLOGICAL SOCIETY BUILDING  
 508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Parrish Oil Company**

SEC. **29** T. **17S** R. **19W**  
 LOC. **SW NE SW**

FARM **Johnson**

NO. **2**

COUNTY **Rush**

TOTAL DEPTH **4,010'**

COMM. **February 7, 1977**


COMP. **February 16, 1977**

SHOT OR TREATED

CONTRACTOR **H-30, Inc.**

ISSUED **February 23, 1977**

KANSAS



CASING

20	10		
15		<b>8-5/8" 259' cemented w/175 sbs cement</b>	ELEVATION <b>2,141 KB</b>
12	6		
13	5		

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale and Lime	<b>750'</b>
Sand	<b>1,015'</b>
Shale	<b>1,342'</b>
Anhydrite	<b>1,387'</b>
Shale and Lime	<b>2,571'</b>
Lime and Shale	<b>3,495'</b>
Lime	<b>4,010'</b>
Rotary Total Depth	<b>4,010'</b>

*FEB 23 1977*  
*2-24-77*

I hereby certify the above and foregoing to  
 be a true and correct log of the above described  
 well as shown by the drilling reports.

**H-30, INC.**

*Sean Britting*  
 Sean Britting

State of Kansas }  
 County of Sedgwick } SS:

Subscribed and Sworn to before me a Notary Public  
 in and for said county and state this 23rd. day  
 of February, 1977.



*Elsie Willison*  
 Elsie Willison - Notary Public

Commission Expires:

**June 30, 1978**