

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Rush County. Sec. 8 Twp. 18 Rge. (E) 16 (W)

Location as "NE/CNW/SW" or footage from lines. Q/1/2/4/8

Lease Owner Solar Oil Company

Lease Name Luft-Maneth Well No. 1

Office Address 1117 Union National Building, Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 4-29-68

Application for plugging filed 4-29-68

Application for plugging approved 4-29-68


Plugging commenced 4-29-68

Plugging completed 4-29-68

Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

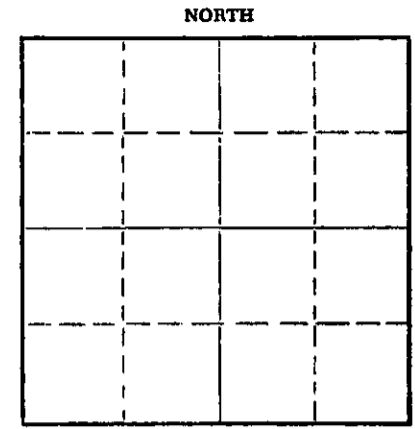

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well R. M. Brundage

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well \_\_\_\_\_ Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	1016	0

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy mud to 500' - Set bottom plug with 20 sacks cement thru DP. Set top plug at 200' with 20 sacks cement. Filled top 40' with balls and mud.

RECEIVED  
STATE CORPORATION COMMISSION

APR 28 1966  
4-28-66

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Lewis Drilling Company  
Address 915 Union Center, Wichita 2, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.

J. FRED HANBRIGHT (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. Fred Hanbright  
915 Union Center, Wichita, Kansas  
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of May, 19 68

My commission expires 2-20-69  
A. R. Darrington  
(A. R. Darrington) Notary Public.

15-165-01794-0000


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- SOLAR OIL CO.  
Farm- Luft-Maneth No. 1

SEC. 8 T. 18 R. 16W  
C W/2 NW SE

Total Depth. 3500'  
Comm. 4-18-58 Comp. 4-29-58  
Shot or Treated.  
Contractor. Lewis Drlg. Co.  
Issued. 7-5-58

County Rush KANSAS



CASING:  
8 5/8" 1013' cem w/425 ax.

Elevation. 1946' KB

Production. Dry

Figures indicate Bottom of Formations.

sand & clay	95
shale & shells	415
sand	545
red beds	1003
anhydrite	1040
red beds	1500
shale & lime	3170
lime	3220
lime & shale	3330
lime	3496
Granite	3500
Total Depth	

TOPS:	
Anhydrite (scout)	1003
Heebner	3165
Lansing	3224
Base Kansas City	3429
Conglomerate	3457
Granite Wash	3488
Granite	3492

Core #1 3480-3500 - 18' recovery

DST #1 3478-3500, Initial Bottom Hole and final Bottom Hole pressures failed. Tool op 1 hr, weak blow thruout, rec. 15' mud - no gas, no spots of oil.

No electric log run.

RECEIVED  
STATE CORPORATION COMMISSION  
FEB 22 1966  
2-22-66  
CONSERVATION DIVISION  
Wichita, Kansas