

15-165-02116-0000

PHONES 2-0488—L. D. 78

HOMER HOCH, CHAIRMAN
JESSE W. GREENLEAF
ERNEST E. BLINCOE
COMMISSIONERS


C. H. BENSON, SECRETARY
STATE CAPITOL
TOPEKA, KANSAS



STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
800 BITTING BUILDING
WICHITA, KANSAS

STATE OIL UMPIRE
T. A. MORGAN, WICHITA
OIL ADVISORY COMMITTEE
RALPH J. PRYOR, CHAIRMAN,
WICHITA
WALTER S. FEES, IOLA
E. W. PYLE, WICHITA
LEE SCOTT, WICHITA
H. M. WILLIAMS, WICHITA
MARVIN LEE, SECRETARY AND
TECHNICAL ADVISER

IN REPLY PLEASE
REFER TO THIS
SUBJECT

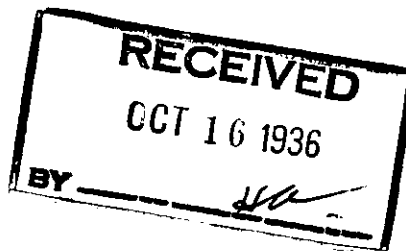

T. A. Morgan, Director,
800 Bitting Building,
Wichita, Kansas

Dear Sir:

I have today given verbal permission
to the following plugging operation:

Operator MORGAN FLYNN & Cobb

Address 409 ATLAS BLDG TULSA OKLA.

Farm Name SHAFFER Well No. #1

Description SE 1/4 Sec. 22 Twp. 18 Rge. 14

County RUSH

PLUGGING
FILE SEC 22 T 18 R 16
BOOK PAGE 65 LINE 6

Remarks: HAD SHOW OF GAS AT 3497- HAD TO 3595

WILL BRING MUD UP TO 1000 FT OF TOP-SET BRIDGE OF WOODEN-PLUG,
WIRE & ROCK AND TAMP THEN A 15 FT CEMENT PLUG, ALLOW TO
SET 72 HOURS, WILL THEN MUD TO 400 OF TOP-SET SECOND
BRIDGE & CEMENT PLUG AND ALLOW TO STAND 72 HOURS.
FOLLOWED BY FILLING WITH MUD TO TOP AND CEMENT BOTTOM OF
CELLAR, THEN FILL CELLAR TO LAND LEVEL

Yours very truly,