


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

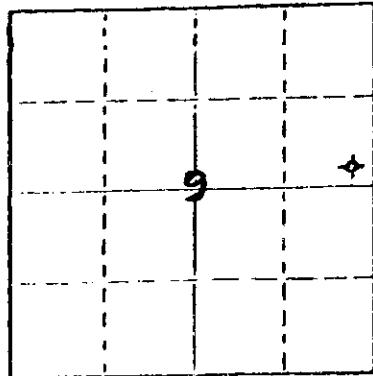

## WELL PLUGGING RECORD

Rush County. Sec. 9 Twp. 17S Rge. 19W ~~xxx~~  
Location as "NE/CNW{SW}" or footage from lines

SE SE NE

Lease Owner D. R. Lauck Oil Company, Inc.

Lease Name Weber Well No. 1

Office Address 221 S. Broadway, Suite 400, Wichita, Ks.

Character of Well (Completed as Oil, Gas or Dry Hole)

## Dry Hole

Date Well completed May 26, 1979

Application for plugging filed May 26, 1979

Application for plugging approved May 26, 1979

Plugging commenced May 26, 1979

Plugging completed May 26, 1979

Reason for abandonment of well or producing formation

## Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey  
Producing formation Depth to top Bottom Total Depth of Well 3961  
Show depth and thickness of all water, oil and gas formations.

## OIL, GAS OR WATER RECORDS

## CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0'	274'	8-5/8"	267.24'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged with 70 sacks cement at 450',  
20 sacks cement at 250', 10 sacks cement  
at 40', and 5 sacks cement in rat hole.

RECEIVED  
STATE CORPORATION COMMISSION  
6-6-79  
JUN 6 1979

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co.

CONSERVATION DIVISION  
Wichita, Kansas


STATE OF KANSAS COUNTY OF SEDGWICK, ss.  
John D. Knightley (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

*John D. Knightley*  
221 S. Broadway, Wichita, Ks. 67202  
(Address)

SUBSCRIBED AND SWORN TO before me this 4th day of June, 1979  
My commission expires March 12, 1983

*Stella J. Lipp*  
Notary Public.



15-165-20723-0000

D. R. Lauck Oil Company, Inc. - Weber #1  
SE SE NE Sec. 9-17S-19W  
Rush County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.  
221 S. Broadway, Suite 400  
Wichita, Kansas 67202

Commenced: May 17, 1979  
Completed: May 26, 1979

Drillers Log

Clay & Blue Shale	277
Blue Clay	650
Red Bed	775
Sand	940
Red Bed & Anhydrite	1375
Shale	2025
Shale & Shells	2250
Shale & Lime	3515
Lime & Shale	3520
Lime	3883
Lime & Shale	3961 RTD

RECEIVED  
STATE CORPORATION COMMISSION

JUN - 6 1979

CONSERVATION DIVISION  
Wichita, Kansas