

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Building  
Wichita, Kansas 67202

WELL PLUGGING RECORD  
K.A.R.-82-3-117

API NUMBER 16-165-21,486-0000

LEASE NAME Leo P.

TYPE OR PRINT  
NOTICE: Fill out completely  
and return to Cons. Div.  
office within 30 days.

WELL NUMBER 1-35

660 Ft. from S Section Line

2100 Ft. from E Section Line

SEC. 35 TWP. 17 RGE. 19 (E) or (W)

COUNTY Rush

LEASE OPERATOR Balcron Oil Company

ADDRESS P.O. Box 58104 Billings, Montana 58104

PHONE# (406) 259-7860 OPERATORS LICENSE NO. 3701

Character of Well D&A

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Date Well Completed 8-10-89

Plugging Commenced 8-10-89

Plugging Completed 8-10-89

The plugging proposal was approved on 8-7-89 (date)

by Steve Paifer (KCC District Agent's Name).

to be filled by

Is ACO-1 filed? operator If not, is well log attached? yes

Producing Formation \_\_\_\_\_ Depth to Top \_\_\_\_\_ Bottom \_\_\_\_\_ T.D. 4351

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.

Bottom Plug: @ 3917 w/40 sacks cement thru drill pipe  
Next Plug: @ 1045 w/50  
Next Plug: @ 600' w/50 " " " " "  
Top Plug: @ 40' w/10 " " " " " 15 sacks in Rat Hole

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Duke Drilling Co., Inc. License No. \_\_\_\_\_

Address P.O. Box 823 Great Bend, KS 67530

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Balcron Oil Company


STATE OF Kansas COUNTY OF Barton, ss.

Jay Schneider (Employee of Operator) or (Contractor) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed that the same are true and correct, so help me God.

(Signature) Jay Schneider

(Address) P.O. Box 823 Great Bend, KS 67530

SUBSCRIBED AND SWORN TO before me this 17 day of August, 19 89



Dorothy M. Hague  
Notary Public

RECEIVED  
STATE CORPORATION COMMISSION  
AUG 22 1989  
8-22-89  
CONSERVATION DIVISION  
Wichita, Kansas

**DRILLER'S WELL LOG**

DATE COMMENCED: August 3, 1989  
 DATE COMPLETED: August 10, 1989

Balcron Oil Company  
 LEO P. #1-35  
 120' W of C SW SE  
 Sec. 35, T17S, R19W  
 Rush County, Ks.

- 0 - 1016' Surface Soil, Sand, Shale
- 1016 - 1260' Shale
- 1260 - 1306' Anhydrite
- 1306 - 1475' Shale, Red Bed
- 1475 - 2000' Shale & Lime
- 2000 - 3950' Lime & Shale
- 3950 - 4187' Dolomite
- 4187 - 4290' Fellspar, Quartz, Mica
- 4290 - 4351' Sand, Fellspar, Quartz, Mica
- 4351' RTD


ELEVATION: 2108 K.B.

Surface Pipe: Set new  
 8-5/8", .237 spc @1014'  
 w/375 sacks 60/40pozmix  
 2% gel 3% cc.


**A F F I D A V I T**

STATE OF KANSAS  
 COUNTY OF BARTON) ss

Jay Schneider of lawful age, does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

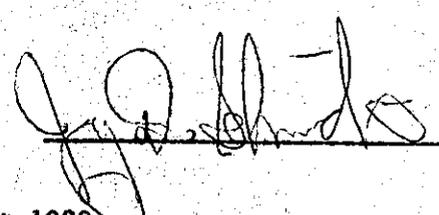

Subscribed and sworn to before me this 17 day of August 1989.



*Dorothy M. Hague*  
 Notary Public

RECEIVED  
 STATE CONSERVATION COMMISSION  
 AUG 22 1989  
 8-22-89  
 CONSERVATION DIVISION  
 Wichita, Kansas