

15-189-00685-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Stevens County, Sec. 1 Twp. 35S Rge. (E) 35(W)

Location as "NE/CNWxSWx" or footage from lines C SW NE  
Lease Owner Anadarko Production Company  
Lease Name Denman "A" Well No. 1  
Office Address P. O. Box 351 Liberal, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9/29 1966  
Application for plugging filed 9/29 1966  
Application for plugging approved 9/29 1966  
Plugging commenced 9/29 1966  
Plugging completed 9/29 1966  
Reason for abandonment of well or producing formation Dry Hole

NORTH

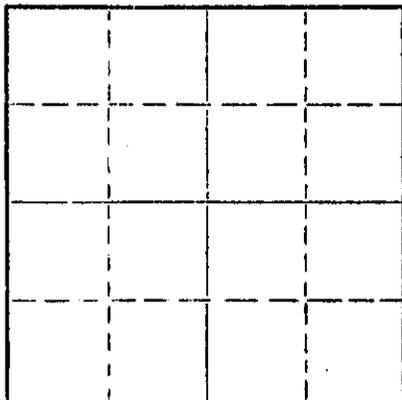

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production - 19 -  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ev Eves Sublette, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 6800 Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	1640'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Spotted 25 sacks cement 2900' to 3000'. Filled hole with mud to 700'.  
Spotted 35 sacks cement 600' to 700'. Filled hole with mud to 45'.  
Cemented 0' to 45' with 15 sacks cement.  
Complete at 10:00 p.m. 9/29/66.

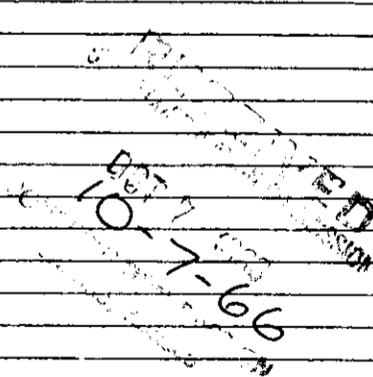

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Graham-Michaelis Drilling Company  
Address Graham Building, 211 North Broadway, Wichita, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.  
V. K. Downey (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

V. K. Downey, Superintendent (Signature) [Signature]  
Liberal Production Region P. O. Box 351 Liberal, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 6th day of October, 1966  
Donald L. Vanglerson Notary Public.

My commission expires Sept. 29, 1968

DRILLER'S LOG

15-189-00685-0000

WELL NAME: Denman "A" No. 1; COMPANY OPERATING: Anadarko Production Company  
 ADDRESS of COMPANY: Box 351 Liberal, Kansas

WELL LOCATION: C 1/4 SW 1/4 NE 1/4,  
3300 ft. North of South line,  
3300 ft. East of West line; Sec. 1, Twp. 35S, Rge. 35W, Stevens County, Kansas

DRILLING STARTED 9/15, 1966; DRILLING COMPLETED 9/29, 1966  
 WELL COMPLETED \_\_\_\_\_, 19\_\_\_\_; WELL CONNECTED \_\_\_\_\_, 19\_\_\_\_

ELEVATION: 2947.9 ft. Ground Level; CHARACTER OF WELL (Oil, Gas, or Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION					
Name	From	To	No. of Shots	Gallons Used	Kind Used

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8-5/8	1640'	1000	None

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Surface Sand	0	630			
Red Bed	630	1083			
Sand & Red Bed	1083	1641			
Anhy & Red Bed	1641	1795			
Red Bed	1795	2297			
Red Bed & Shale	2297	2995			
Shale & Lime	2995	5339			
Lime	5339	5469			
Lime & Shale	5469	6604			
Lime	6604	6742			
Lime & Shale	6742	6800			
Total Depth		6800			

RECEIVED  
 OCT 7 1966  
 PRODUCTION DIVISION

RESULTS of INITIAL PRODUCTION TEST: Plugged & Abandoned on 9/29/66.