

15-165-20714-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rush County, Sec. 28 Twp. 17S Rge. 20W 1/4 NW
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
NE/4 NE/4 NW/4

Lease Owner L. G. Stephenson & Co., Inc.
Lease Name Ryan Well No. 1
Office Address 7701 East Kellogg, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) D & A

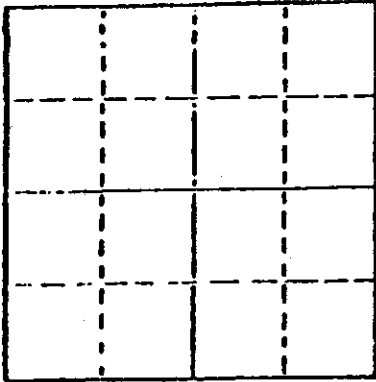

Locate well correctly on above
Section Plot

Date Well completed March 10, 1979
Application for plugging filed March 10, 1979
Application for plugging approved March 10, 1979
Plugging commenced March 10, 1979
Plugging completed March 10, 1979
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 4,100'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	467'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 500' w/100 sx cement
2nd plug @ 240' w/150 sx cement
3rd plug @ 50' w/100 sx cement

STATE RECEIVED
03-16-1979
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~owner~~)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 14th day of March, 1979.

Joyce A. Hagermann
Notary Public.

My commission expires



15-165-20714-00-00

DRILLERS LOG

No. 1 Ryan

CASING RECORD:
8 5/8" @ 474'
w/285 sx cement

COMPANY: L. G. Stephenson & Co., Inc.
CONTRACTOR: Red Tiger Drilling Company
COMMENCED: March 2, 1979
COMPLETED: March 10, 1979

DESCRIPTION:
NE/4 NE/4 NW/4
Sec. 28-T17S-R20W
Rush County, Kansas

TOTAL DEPTH: 4,100'

ELEVATION: 2,168 GR

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand	0	400	
Shells & Shale	400	476	
Shale	476	621	
Sand	621	684	
Shale	684	840	
Sand	840	1100	
Shale	1100	1200	
Shells & Shale	1200	1410	
Anhydrite	1410	1440	
Red Bed & Shale	1440	1750	
Shale	1750	2215	
Shale & Lime	2215	2415	
Shale	2415	2590	
Shale & Lime	2590	3435	
Lime & Shale	3435	3736	
Lime	3736	3795	
Lime & Shale	3795	3895	
Lime	3895	4100	
RTD		4100	


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 14th day of March, 1979.

Joyce A. Hagermann
Notary Public



RECEIVED
STATE CONSERVATION COMMISSION
MAR 16 1979
CONSERVATION DIVISION
Wichita, Kansas
03-16-1979