


15-165-02121-00 00

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Rush County. Sec. 22 Twp. 18 Rge. 16 (E) (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Morgenstern & Specter
Lease Name Schneider Well No. #1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 4-21-56 19____
Application for plugging filed August 20, 1961 19____
Application for plugging approved August 21, 1961 19____
Plugging commenced September 5 - 61 19____
Plugging completed September 7 - 61 19____
Reason for abandonment of well or producing formation failure to produce profitably

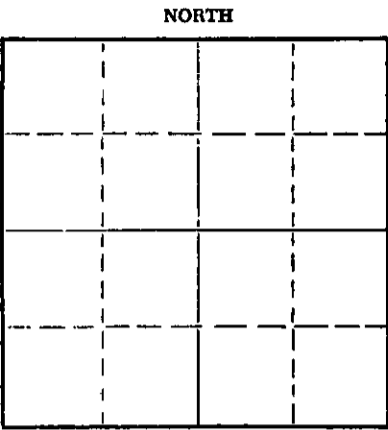

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty Hays, Kansas
Producing formation Reagan Sand Depth to top 3538 Bottom 3570 Total Depth of Well 3575 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	1023 ft.	none
				5 1/2" OD	3575'	3090 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3150 feet, Dumped 4 sacks - cement.
Mudded hole up to 350 feet, Set a rock bridge.
Dumped 20 sacks cement, Mudded hole up to 150 feet.
Set a rock bridge, Dumped 20 sacks cement.
Mudded hole up to 40 feet, Set a rock bridge.
Dumped ten sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 25 1961
7-25-61
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor LYNCH CASING PULLING COMPANY. NO. 457
Address R. Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13th day of September, 1961

My commission expires April, 1964
[Signature] Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
503 East Murdock, Wichita, Kansas

15-165-02121-0000


COPY

Company- WELCH & OLSSON DRIG. AND HAROLD KOTTWITZ
Farm- Schneider No. 1

SEC. 22 T. 18 R. 16W
SW 3E ST

Total Depth. 3575'
Comm. 4-11-56 Comp. 4-21-56
Shot or Trestle.
Contractor. Welch & Olsson Drig.
Issued. 6-9-56

County Rush KANSAS



Elevation. 1969' RB

Production: 43 BOPD

CASING:

8 5/8" 1022.92' con w/400 sx
5 1/2" 3575' con w/75 sx

Figures indicate Bottom of Formations

shale	245
blue clay	430
sand	540
red bed & shale	640
shale & clay	765
red bed & shale	905
shale, red bed & shells	1003
anhydrite	1027
shale & red bed	1040
shale & shells	1745
shale & lime	2595
shale & shells	2645
shale & lime	2910
lime & shale	3215
lime	3540
Reagan sand	3575
Total Depth	

Tops:	
Heobner	3183
Toronto	3201
Douglas	3216
Lansing-Kansas City	3245
Base Kansas City	3472
Conglomerate	3514
Reagan Sand	3538
Pre-Cambrian	3570