


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

15-165-02114-0000

WELL PLUGGING RECORD

NORTH

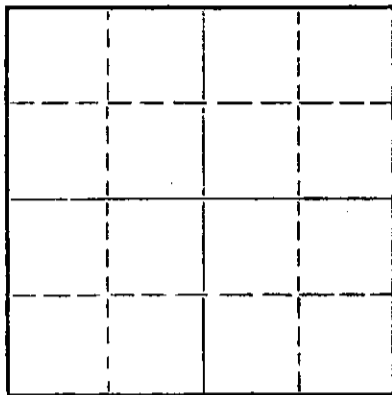

Locate well correctly on above
Section Plat

Rush County, Sec. 22 Twp. 18 Rge. 16 (E) (W)

Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Morgenstern & Specter
Lease Name Schneider Well No. #4
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 10-28-57 19____
Application for plugging filed August 21, 1961 19____
Application for plugging approved August 22, 1961 19____
Plugging commenced 8/31/61 19____
Plugging completed 9/3/61 19____
Reason for abandonment of well or producing formation failure to produce profitably
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty Hays, Kansas
Producing formation Reagan Sand Depth to top 3565 Bottom 3625 Total Depth of Well 3650 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8" OD	1010'	none
				4 1/2" OD	3649'	2925 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3150 feet, Dumped 4 sacks cement.
Mudded hole up to 350 feet. Set a rock bridge.
Dumped 20 sacks cement, Mudded hole up to 150 feet.
Set a rock bridge, Dumped 20 sacks cement.
Mudded hole up to 40 feet, Set a rock bridge.
Dumped ten sacks cement.

RECEIVED
STATE CORPORATION COMMISSION
SEP 14 1961
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457
Address Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas, COUNTY OF Russell, ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morton Specter
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this sixth day of September, 1961

My commission expires Dec 6 1964
Eddie Conroy Notary Public.

15-165-02114-0000


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- CHIEF DRILLING CO.
Farm- Schneider No. 4

SEC. 22 T. 18 R. 16W
SE SW SW

Total Depth. 3650'
Comm. 10-18-57 Comp. 10-28-57
Shot or Treated.
Contractor. Chief Drig. Co.
Issued. 4-26-58

County Rush
KANSAS



CASING:
8 5/8" 1010' cem w/450 sx.
4 1/2" 3649' cem w/100 sx.

Elevation. 1984' DF

Production. 25 BOPD

Figures indicate Bottom of Formations.

shale, clay & shells	320
shale & shells	460
sand	575
shale, shells & red bed	750
red bed	997
Anhydrite	1050
red bed & shale	1150
shale & shells	1780
shale & lime	3276
lime	3500
shale & lime	3534
Conglomerate	3565
sand	3625
Quartzite & Schist	3650
Total Depth	

TOPS:	
Anhydrite	997
Heebner	3216
Toronto	3233
Douglas	3247
Lansing	3276
Base Kansas City	3499
Conglomerate	3534
Reagan Sand	3565
Pre Cambrian	3625