


15-165-02123-0000

WELL PLUGGING RECORD

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Deliver Report to:
 Conservation Division
 State Corporation Commission
 211 No. Broadway
 Wichita, Kansas

Rush County, Sec. 22 Twp. 18 Rge. 16 (E) (W)
 Location as "NE/CNW/SW" or footage from lines SW SW SW
 Lease Owner Morgenstern & Specter
 Lease Name Schneider Well No. 3
 Office Address Russell, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) oil
 Date well completed 7-23-56 19
 Application for plugging filed August 21, 1961 19
 Application for plugging approved August 22, 1961 19
 Plugging commenced 8/22/61 19
 Plugging completed 8/25/61 19
 Reason for abandonment of well or producing formation failure to produce profitably
 If a producing well is abandoned, date of last production _____ 19
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

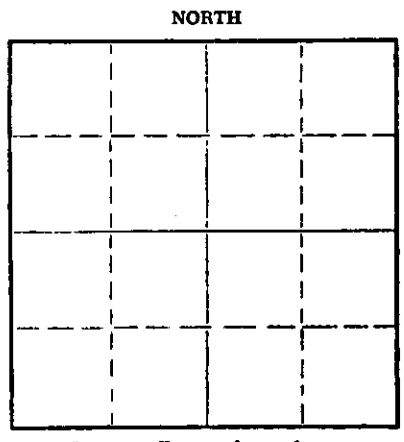

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty Hays, Kansas
 Producing formation Reagan Sand Depth to top 3547 Bottom 3629 Total Depth of Well 3630' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"OD	1015ft.	none
				5 1/2"OD	3629'	2990 feet

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugged back with sand to 3150 feet. Dumped 4 sacks - cement.
Mudded hole up to 350 feet. Set a rock bridge.
Dumped 20 sacks cement, Mudded hole up to 350 feet.
Set a rock bridge, Dumped 20 sacks cement.
Mudded hole up to 40 feet, Set a rock bridge.
Dumped ten sacks cement.

RECEIVED
 STATE CORPORATION COMMISSION
 SEP 14 1961
 9-14-61
 CONSERVATION DIVISION
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor LYNCH CASING PULLING COMPANY NO. 457
 Address R.Rt. 4 GREAT BEND, KANSAS

STATE OF Kansas COUNTY OF Russell ss.
Morgenstern & Specter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Morgenstern & Specter
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 29th day of August, 1961
Ruth E Miller

My commission expires January 5, 1965.

Notary Public.



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY

503 East Main Street,

Wichita, Kansas


KS-1165-02123-0000

Company: WELCH & OLSSON DRG. CO., INC.
 Firm: Schneider No. 3

S. 22 T. 19 R. 16W
 SW SW SW

Total Depth. 3630'
 Comm. 7-13-56 Comp. 7-23-56
 Shot or Treated.
 Contractor, Welch & Olsson Drg. Co., Inc.
 Issued. 8-25-56

County Wash



CASING:
 8 5/8" 1015' w/450 sx cem.
 5 1/2" 3629' w/74 sx cem.

Elevation. 1969' RB

Production. 25 Bbls.

Figures indicate Bottom of Formation

surface soil-clay	120
shale-red bed	250
Pyrite sand	370
shale	425
sand	640
sand-shale-shells-red bed	985
red bed-shale	1009
Anhydrite	1015
sdv anhydrite	1035
shale w/strs. red bed	1415
shale	1730
shale-shells w/lime strks	1860
shale w/lime strks	2090
lime-shale	2500
shale-shells	2875
shale-lime	3250
lime	3530
sand	3588
lime-shale	3630
Total Depth	
TOPS:	
Hecbner	3196
Toronto	3213
Douglas	3227
Lansing-Kansas City	3256
B/Kansas City	3479
Conglomerate	3518
Reagon sand	3547
Pre-Cambrian	3598