


DISTRICT CONSERVATION AGENT'S REPORT

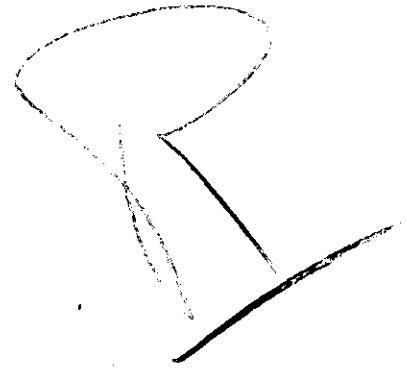

TO:

State Corporation Commission  
Conservation Division  
800 Bitting Building  
Wichita, Kansas

FILE NO. 190-41

LOCATION DE/4

SEC. 16 TWP. 15 RGE. 16-0

Dry Hole        Abandoned Oil Well        Abandoned Gas Well X

I have today completed supervision of plugging of:

Well No. 1 Lease Bush

Operator Green Pipe & Supply Co Address Bolton - Tulsa - Okla.

Field        County Bush

Total Depth 3301 Feet.

APR 1 1950  
4-19-50

(Describe briefly the manner in which the well was plugged)

Casing in H.C. - 1 1/2" - 305 ft - connected - 1 1/2" - 457 ft  
8 3/4" - 2150 ft - 7 5/8" - 3435 ft - 5 1/2" - 3465 ft -  
7" x 1 1/2" casing connected together with 100 sacks cement.  
Set Rock Bridge x 7 sacks of cement in the 5 1/2" casing  
at 1435 ft - Ripped off & pulled - 1900 ft - of the 5 1/2" casing &  
1900 ft of the 7" casing - Set Rock Bridge at 1900 ft & 7 sacks  
of cement at 1900 ft - Filled the 5 1/2" casing with mud to  
2150 ft - Bridge & 8 sacks of cement at 2150 ft - Mud to top  
Bridge & 10 sacks of cement in the 8 3/4" casing at the surface.  
Pumped hole full by cement between the 8 3/4" & the 1 1/2"  
& between the 1 1/2" & the 1 1/2" casing - 750 sacks of cement

I checked this plug - 7 ft  
4-19-50 - & found it O.K.  
Bill Morgan - Plugging Contractor

District Conservation Agent  
**PLUGGING**  
Date         
FILE        SEC.        TWP.        RGE.         
OK PAGE 16 OF 16 LINES