

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGIN
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-019-26762-00-01
Spot: NWSESWNW Sec/Twnshp/Rge: 4-32S-13E
3177 feet from S Section Line, 4469 feet from E Section Line
Lease Name: VAUGHN Well #: 5-4
County: CHAUTAUQUA Total Vertical Depth: 1638 feet

Operator License No.: 34779
Op Name: LR ENERGY, INC.
Address: 8150 N. CENTRAL EXPY, STE 1605
DALLAS, TX 75206

String	Size	Depth (ft)	Pulled (ft)	Comment
PROD	4.5	1645		165 SX
SURF	8.625	45		8 SX
T1	2.375	914		

Well Type: CM UIC Docket No: _____ Date/Time to Plug: 01/23/2013 12:00 AM
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC
Proposal Rcvd. from: JACOB MCCLAIN Company: _____ Phone: (620) 627-2499

Proposed Plugging Method: 50' cement plug on bottom. Pump gel spacer to 1291' Pump 420' cement plug to cover all perforated zones. Pump gel spacer to 275'. Pump cement from 275' to surface.

Plugging Proposal Received By: DUANE SIMS WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 01/23/2013 10:00 AM KCC Agent: DUANE SIMS

Actual Plugging Report:

Ran 2" to 1635' gelled hole and spotted 10 sack plug. Pulled up to 1291' and spotted 45 sack plug. Pulled up to 275' and circulated cement to surface. Pulled 2" and topped well off. A total of 80 sacks of 60/40 pozmix cement to plug this well.

Perfs:

Top	Bot	Thru	Comments
1286	1290		
1268	1269		
1267	1269		
1229	1234		
1228	1233		
1212	1215		
872	873		
871	873		

RECEIVED

APR 09 2013

KCC Chanute Dist. #3

DS

RECEIVED
KANSAS CORPORATION COMMISSION

APR 11 2013

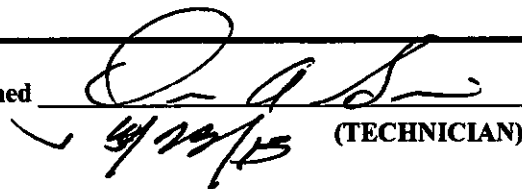
CONSERVATION DIVISION
WICHITA, KS

Remarks:

Plugged through: TBG

District: 03

Signed


(TECHNICIAN)