

TO: STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-065-03226-00-00
Spot: SESWNE Sec/Twnshp/Rge: 33-10S-23W
2970 feet from S Section Line, 1650 feet from E Section Line
Lease Name: DIEBOLT B Well #: 7
County: GRAHAM Total Vertical Depth: 3794 feet

Operator License No.: 30606
Op Name: MURFIN DRILLING CO., INC.
Address: 250 N WATER STE 300
WICHITA, KS 67202

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3664		
PROD	5.5	3780		125 SX
SURF	8.625	215		175 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 02/05/2013 10:00 AM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: JOHN GERSTNER Company: MURFIN DRILLING CO., INC. Phone: (785) 421-2103

Proposed Plugging Method: Shot perforations at 2385', 1880', 1080' and 210'.
Perforations at 3566' to 3569', 3584' to 3587', 3617' to 3619', 3628' to 3631'.
PBTD at 3664' with cast iron bridge plug.
Ordered 450 sx 60/40 pozmix 4% gel cement w/600 # hulls.

Plugging Proposal Received By: MARVIN MILLS Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 02/05/2013 2:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 3596' and pumped 100 sx cement w/200 # hulls.
Pulled tubing to 2496' and pumped 120 sx cement w/200 # hulls.
Pulled tubing to 1367' and pumped 140 sx cement. Good circulation of cement.
Pumped 45 sx cement in back side.
Pulled tubing out. Topped off casing w/25 sx cement. Hole standing full.

GPS: 39.14026 -099.89035

Perfs:

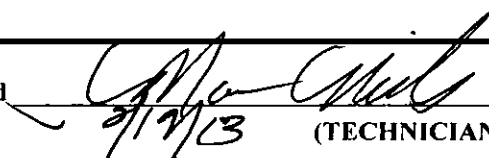
Top	Bot	Thru	Comments
3780	3792		
3764	3768		
3748	3752		
3628	3631		
3617	3619		
3584	3587		
3566	3569		

Remarks: SWIFT SERVICES TICKET # 23859

Plugged through: TBG

District: 04

Signed


2/12/13 (TECHNICIAN)

CM

RECEIVED

Form CP-2/3

FEB 14 2013

FEB 11 2013

KCC WICHITA