


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

NORTH

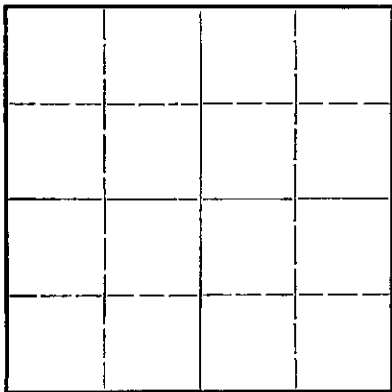

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well **H. W. Kerr**

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well **3869** Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				13-5/8"	155'	None
				8-5/8"	1160'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Circulated heavy mud top to bottom
Set wood plug at 300' and set 25 sax cement
Filled hole to 30' with heavy mud
Set wood plug at 30' and filled hole to bottom of cellar
with 10 sax cement

10 19 18W
8-2 8

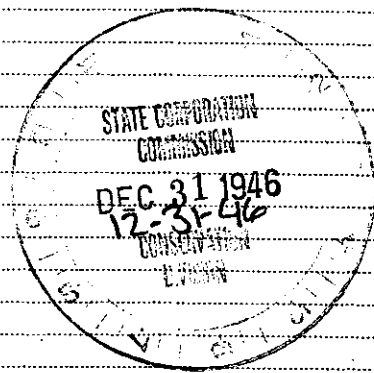

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to **Iron Drilling Company**
Address **1206 Philtower Building Tulsa, Okla.**

STATE OF **Oklahoma**, COUNTY OF **Tulsa**, ss.
Herriok Babcock (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Herriok Babcock*
1206 Philtower Building, Tulsa, Okla.
(Address)

SUBSCRIBED AND SWORN to before me this **14th** day of **November**, 19 **46**

My commission expires

Feb. 28, 1948

B. Michal

Notary Public.

DRILLING RECORD

Well No. 1 Thalheim
NE $\frac{1}{4}$ NE $\frac{1}{4}$ NW $\frac{1}{4}$ of Sec. 10-19S-18W
Rush County, Kansas

Work Commenced 10/19/46
Drilling Commenced 10/21/46
Drilling Completed 11/9/46
Work Completed 11/10/46

Casing Record

155' of 13 3/8" OD Surface
pipe cemented with 100 sax.
1160' of 8 5/8" OD cem. w/ 600 sax.
No Oil String - Dry Hole

WELL LOG

Surface Clay	0 to 30
Post Rock	30 to 55
Sand & Clay	55 to 130
Shale & Shells	130 to 540
Sand	540 to 611
Sand & Shale	611 to 700
Sand & Red Bed	700 to 915
Red Bed & Shale & P.T.Iron	915 to 1115
Red Bed & Shale	1115 to 1153
Anhydrite	1153 to 1186
Shale & Shells	1186 to 1750
Salt Shale & Shells	1750 to 1980
Shale & Lime	1980 to 2114
Lime	2114 to 2145
Sandy Lime	2145 to 2325
Lime	2325 to 2555
Broken Lime	2555 to 2670
Shale	2670 to 2815
Shale & Lime	2815 to 3138
Lime	3138 to 3160
Lime & Shale	3160 to 3425
Broken Lime	3425 to 3470
Lime	3470 to 3517
K.C. Lime & Red Shale Streaks	3517 to 3560
Shale	3560 to 3593
Lime & Shale	3593 to 3630
Lime	3630 to 3710
Shale	3710 to 3827
Dolomite	3827 to 3861
Lime	3861 to 3869 TD - Plugged & Abandoned 11/9/46

C E R T I F I C A T I O N

State of Oklahoma, County of Tulsa, SS

I, Herriek Babcock, Partner of Iron Drilling Company, Certify that the accompanying is a true and correct log of the above described well.

Signature

Herriek Babcock

Subscribed to and Sworn before me this 14th day of November, 1946.

J. Michal

Notary Public

My commission expires Feb. 28, 1948.

10 19 18W
82 8