


15-165-20425-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

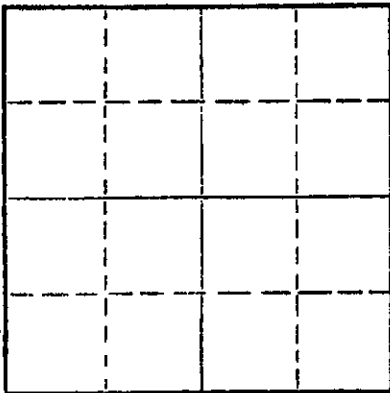

Locate well correctly on above
Section Plat

Rush County, Sec. 16 Twp. 18S Rge. 20 (W)
Location as "NE/CNW/SW" or footage from lines C NE NW
Lease Owner Pickrell Drilling Company
Lease Name Bryant "A" Well No. 1
Office Address 705 Fourth National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed April 1 19 72
Application for plugging filed April 1 19 72
Application for plugging approved April 1 19 72
Plugging commenced April 1 19 72
Plugging completed April 1 19 72
Reason for abandonment of well or producing formation Dry Hole


If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation Depth to top Bottom Total Depth of Well 4115 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	254'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Bottom plug @ 450' w/50 sacks, middle plug @ 240' w/25 sacks,
top plug @ 40' w/10 sacks.

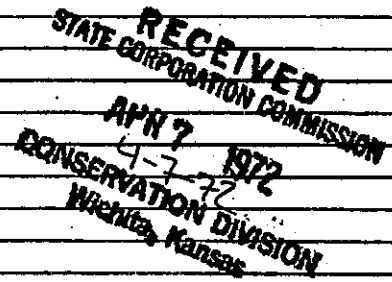


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Pickrell Drilling Company
Address 705 Fourth National Bank Building, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C. W. Sebitts (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. W. Sebitts
705 Fourth National Bank Bldg., Wichita, Kansas (Address)

Subscribed and sworn to before me this 4th day of April, 1972
January 19, 1973



Esther Lamone
Notary Public.

15-165-20425-0000
ROTARY DRILLING LOG

COMPANY: Pickrell Drilling Company
705 Fourth National Bank Building
Wichita, Kansas 67202
Rotary Drilling Commenced 3/22/72

LOCATION: Bryant "A" No. 1, C NE NW Section 16-18S-20W,
Rush County, Kansas
Rotary Drilling Completed 4/2/72

CONTRACTOR: **PICKRELL DRILLING COMPANY**
Wichita, Kansas

CASING RECORD: Run 6 Jts. 8-5/8" surface casing set @ 254' KB. Cemented with 150 sacks. Completed 7:00 PM. Circulated.

No oil string run. D & A, Plugged 12:30 A.M. April 2, 1972.

LOG

(Figures indicate bottom of formation — measurements from top of rotary bushing.)

50	Surface Soil	
255	Shale & Shells	C.F.S.
340	Shale	4025
420	Sand	4040
700	Shale & Red Bed	4052
985	Sand	4102
1316	Red Beds	4115
1352	Anhydrite	
1405	Red Beds	
2055	Shale	
2455	Lime & Shale	
2885	Lime	
3205	Lime & Shale	
3345	Lime	
3440	Lime & Shale	
3586	Shale - Lime	
4088	Lime	
4115	Mississippi, RTD	Slope Tests
		2000
		2500
		3000
		3500
		4000

RECEIVED
STATE CORPORATION COMMISSION
APR 7 1972
4-7-72
CONSERVATION DIVISION
Wichita, Kansas


The undersigned, C. W. Sebitts, Attorney-in-Fact for PICKRELL DRILLING COMPANY, hereby certifies in behalf of said Company, that the above is a true and correct log of the formation encountered in drilling the above well as reflected by the Daily Drilling Reports.

PICKRELL DRILLING COMPANY
By *C. W. Sebitts* Attorney-in-Fact

STATE OF KANSAS }
COUNTY OF SEDGWICK } ss.:

On this 4th day of April, 1972, before me the undersigned, a Notary Public, in and for the County and State aforesaid, personally appeared C. W. Sebitts, to me known to be the identical person who subscribed the name of PICKRELL DRILLING COMPANY to the foregoing instrument as its Attorney-in-Fact and acknowledged to me that he executed the same as his free and voluntary act and deed, and as the free and voluntary act and deed of such company, for the uses and purposes therein set forth.

Given under my hand and seal of office the day and year last above written.



My commission expires: January 19, 1973

Esther Lamone
Esther Lamone Notary Public