

STATE CORPORATION COMMISSION

CONSERVATION DIVISION AGENT REPORT

245 North Water  
Wichita, KS 67202

API Number 15-191- 21,256 0000

Operator's Full Name Terra Resources, Inc.

Complete Address 202 N.W. 66th St. Box 839, Okla. City, Ok. 73101

Lease Name Martin Well No. # 1

Location SW SW SW Sec. 27 Twp. 31 - SR Rge. 1 (~~East~~) (West)

County Sumner Total Depth 3730' 12123

Abandoned Oil Well      Gas Well      Input Well      SWD Well      D & A X

Other well as hereafter indicated     

Plugging Contractor Silverado Drlg.

Address Wichita, Ks. License No.     

Operation Completed: Hour: 3:00 AM Day: 18 Month: 4 Year: 19 81

The above well was plugged as follows:

8 5/8" sur. csg. 492' circ./cemt.

Allied Cementing pumped all cement.

Filled hole/mud 500', spotted 30 sx. cemt.

Filled hole/mud 250', spotted 30 sx. cemt.

Filled hole/mud 50', spotted 15 sx. cemt.

Pumped 5 sx. cemt. in rathole.

RECEIVED  
STATE CORPORATION COMMISSION

APR 21 1981

CONSERVATION DIVISION  
Wichita, Kansas

I hereby certify that the above well was plugged as herein stated.

INVOICED

DATE 4-21-81

INV. NO. 2969-E

Signed: Doug Thompson  
Conservation Division Agent

DRILLER'S LOG

COMPANY: Terra Resources, Inc.

SEC. 27 T. 31S R. 1W

WELL NAME: Martin #1

LOC. SW SW SW

COUNTY: Sumner

RIG NO. #10

TOTAL DEPTH 3730'

ELEVATION

COMMENCED: 4-7-81

COMPLETED: 4-18-81

CONTRACTOR: Silverado Drilling, Inc.

CASING RECORD:

SURFACE: 8 5/8" @ 492' w/600 sx. common, 3% cc., 2% gel.

PRODUCTION: D&A

LOG

(Figures Indicate Bottom of Formations)

Shale	1042
Shale & Lime	1290
Shale & Sand	1570
Shale & Lime	2175
Lime & Shale	2295
Shale, Lime & Sand	2677
Shale & Lime	3120
Lime & Shale	3676
Lime	3730
<u>ROTARY TOTAL DEPTH</u>	<u>3730</u>

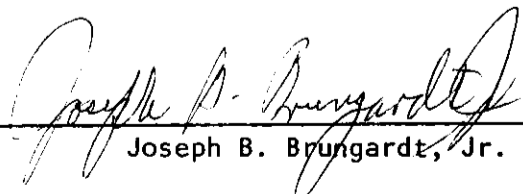
RECEIVED  
STATE OF KANSAS  
APR 23 1981  
CORRECTION DIVISION  
WICHITA, KANSAS

STATE OF Kansas )  
COUNTY OF Sedgwick )


SS:

I, Joseph B. Brungardt, Jr., Acct. of Silverado Drilling, Inc.

upon oath state that the above and foregoing is a true and correct copy of the log of the Martin #1 well.

  
\_\_\_\_\_  
Joseph B. Brungardt, Jr.

Subscribed and sworn to before me this 23 day of April, 1981.

  
JUANITA M. GREEN  
NOTARY PUBLIC  
STATE OF KANSAS  
My Appointment Expires:  
10-4-83

  
\_\_\_\_\_  
Juanita M. Green