

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-051-26524-00-00
Spot: SWSWNESW Sec/Twnshp/Rge: 34-13S-16W
1595 feet from S Section Line, 1560 feet from W Section Line
Lease Name: MARY UNIT Well #: 1
County: ELLIS Total Vertical Depth: 3556 feet

Operator License No.: 9067
Op Name: DAMAR RESOURCES, INC.
Address: 234 W 11TH STE A PO BOX 70
HAYS, KS 67601

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	262		150 sx

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 05/22/2013 12:00 AM
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.
Proposal Rcvd. from: ANDY Company: MURFIN DRILLING CO., INC. Phone: (785) 443-2379

Proposed Plugging Method: Ordered 270 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: DAVID WANN WitnessType: NONE
Date/Time Plugging Completed: 05/22/2013 1:30 PM KCC Agent: DAVID WANN

Actual Plugging Report:

1st plug @3500 w/50 sx
2nd plug @1060 w/25 sx
3rd plug @560 w/100 sx
4th plug @310 w/40 sx
5th plug @40 w/10 sx

Rathole 30 sx Mousehole 15 sx

Perfs:


KCC WICHITA
MAY 30 2013
RECEIVED

Remarks: QUALITY

Plugged through: DP

District: 04

Signed

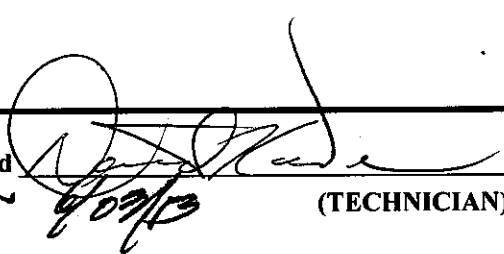

(TECHNICIAN)

CM

MAY 28 2013