

15-165-20938-0000  
STATE OF KANSAS  
STATE CORPORATION COMMISSION  
200 Colorado Derby Bldg.  
Wichita, Kansas 67202

Form CP-4  
Rev. 12-15-80

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit

COUNTY Rush SEC. 33 TWP. 17S RGE. 17W E/W  
Location as in quarters or footage from lines:  
150' S. of W/2 NW NE


Locate Well  
correctly on above  
Section Platt.

Lease Owner Hummon Corporation  
Lease Name Wagner 1-33 Well No. \_\_\_\_\_  
Office Address One Main Place Suite 400 Wichita, Kansas 67202  
Character of Well (Completed as Oil, Gas or Dry Hole): \_\_\_\_\_  
Date Well Completed \_\_\_\_\_  
Application for plugging filed \_\_\_\_\_  
Plugging commenced 6-24-82  
Plugging completed 6-28-82  
Reason for abandonment of well or producing formation \_\_\_\_\_

Depleted

Was permission obtained from the Conservation Division or it's  
Agent's before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Steve Durrant  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ bottom T.D. 3597'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Casing Record

Formation	Content	From	To	Size	Put in	Pulled Out
				8-5/8"	1099'	none
				4-1/2"	3592'	2944'

Describe in detail the manner in which the well was plugged, indicating where the mud  
fluid was placed and the method or methods used in introducing it into the hold. If cement  
or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet  
to \_\_\_\_\_ feet for each plug set.

Squeezed 4-1/2" casing with 1 sack hulls, 30 sacks cement and pumped bottom plug  
to 3200'. Shot casing @3070' and 2945'. Pulled 70 joints of 4-1/2" casing. Squeezed  
hole with 2 sacks hulls, 17 sacks gel, 75 sacks cement, 2 sacks hulls, 13 sacks gel,  
released plug and displaced with 125 sacks cement.

Plugging complete.

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Kelso Casing Pulling

STATE OF Kansas COUNTY OF Rice, ss.  
R. Darrell Kelso (employee of owner) or (owner or operator) of the  
above-described well, being first duly sworn on oath, says: That I have knowledge of the  
facts, statements, and matters herein contained and the log of the above-described well as  
filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso  
Box XXX 347 Chase, Ks. 67524  
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of June, 19 82

My Commission expires:

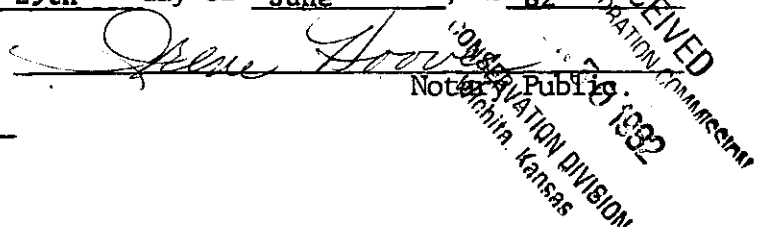

Hummon Corporation  
400 One Main Place  
Wichita, Kansas 67202

-  
Wagner #1-33  
150' W of W/2 NW NE  
Sec. 13-17S-17W  
Rush County, Kansas

Contractor: D. R. Lauck Oil Company, Inc.  
221 S. Broadway, Suite 400  
Wichita, Kansas 67202

Commenced: November 9, 1981  
Completed: November 17, 1981

#### Drillers Log

Post Rock	70
Blue Shale	333
Red Bed	521
Sand	705
Shale	1083
Anhydrite	1122
Shale & Shells	2795
Shale & Lime	3285
Lime	3580
Granite Wash & Granite	3596 RTD

RECEIVED  
STATE CORPORATION COMMISSION  
MAY - 4 1982  
CONSERVATION DIVISION  
WICHITA, KANSAS