


STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

WELL PLUGGING RECORD

Clark County, Sec. 35 Twp. 32 Rge. 23 (E) (W)

NORTH

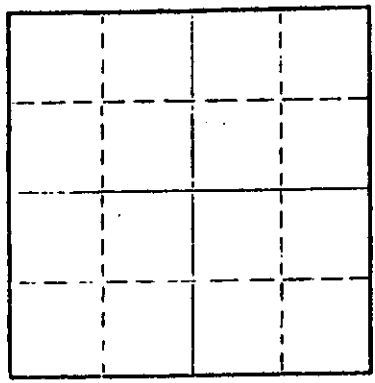

Location as "NE/CNW&SW&" or footage from lines C NE SE  
Lease Owner Beren Corporation  
Lease Name Koehn Well No. 1-35  
Office Address 970 Fourth Financial Center, Wichita, Ks 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed \_\_\_\_\_ 19\_\_\_\_  
Application for plugging filed May 9 1975  
Application for plugging approved May 21 1975  
Plugging commenced May 10 1975  
Plugging completed May 10 1975  
Reason for abandonment of well or producing formation Non Productive  
If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2525 feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Herington</u>	<u>water</u>	<u>2348</u>	<u>2394</u>	<u>13"</u>	<u>515</u>	<u>None</u>
<u>Krider</u>	<u>water</u>	<u>2418</u>	<u>2426</u>	<u>9-5/8"</u>	<u>2497</u>	<u>None</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Well washed down to 2525' and plugged back with 50sx. cement to 2460. Test Krider and plug back to 2360 with 50sx. cement. Test Herington and plug back to 2360 with 25sx. 35sx. Circulate hole with heavy Gel mud and spot 45sx. cement from 700' to 570'. Spot final plug of 15sx from 45' to surface.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Sun Cementing  
Address Box 169, Great Bend, Kansas 67530


STATE OF KANSAS COUNTY OF SEDGWICK ss.  
Jim Thatcher SM THATCHER (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) JIM THATCHER  
970 Fourth Financial Center, Wichita, Ks  
(Address)

Subscribed and Sworn to before me this 23rd day of May, 19 75

My commission expires January 13, 1977  
Catherine A. Carr Notary Public.



RECEIVED  
MAY 28 1975

MAY 28 1975