


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission
312 No. Market
Wichita, Kansas

NORTH

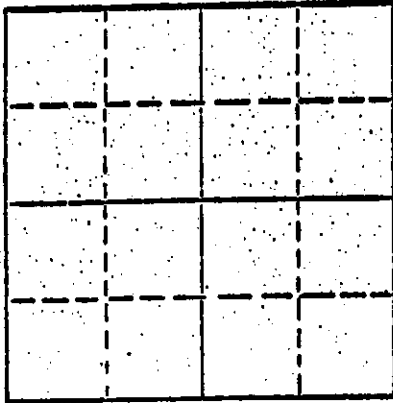

Locate well correctly on above
Section Plat

Rush County, Sec. 9 Twp. 17 Rge. 17 (E) (W)
C SE SE

Location as "NE/CNWSW" or footage from lines
Frontier Oil Company

Lease Owner
Lease Name Appl Well No. A-1

Office Address 310 South Main Russell, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19

Plugging commenced 2-15-71 19

Plugging completed 2-18-71 19

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey

Producing formation Depth to top Bottom Total Depth of Well 3605 Feet

Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	219	None
				4 1/2	3603	2598', 70

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pushed plug to 3000'. Sanded to 3000' and dumped 4 sacks of cement. Shot casing at 2620'. Laid down 79 joints of 4 1/2" casing. Squeezed well with 2 sacks of hulls, 20 sacks of gel and 120 sacks of 50/50 pozmix cement with 6% gel added.



(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Forbes Casing Pulling Company, Inc.
Address P. O. Box 221 Great Bend, Kansas 67530

STATE OF Kansas COUNTY OF Barton, ss.
James W. Rockhold (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
P. O. Box 221 Great Bend, Kansas (Address)



Subscribed and sworn to before me this 8 day of March, 1971

My commission expires May 27, 1973 Notary Public

15.165-20367-0000

RECEIVED
STATE CORPORATION COMMISSION
FEB 10 1971
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

No. 1 Appl "A"

CASING RECORD:	COMPANY:	Frontier Oil Company	DESCRIPTION:
8 5/8" @ 219' w/150 sx cement	CONTRACTOR:	Red Tiger Drilling Co.	C/SE SE 9-17S-17W Rush County, Kansas
4 1/2" @ 3605' w/275 sx cement	COMMENCED:	December 26, 1970	
	COMPLETED:	January 11, 1971	
TOTAL DEPTH: 3605'			ELEVATION: 2077 DF 2080 RB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & post rock	0	40	
Shale	40	500	
Sand	500	815	
Shale	815	1160	
Anhydrite	1160	1198	
Shale	1198	1450	
Shale & shells	1450	1880	
Shale, lime streaks	1880	1955	
Lime & shale	1955	3015	
Lime	3015	3295	
Lime & shale	3295	3372	
Lime	3372	3560	
Lime, Granite Wash	3560	3605	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Jim Farrice
Jim Farrice

Subscribed and sworn to before me this 22nd day of January, 1971.



Virginia K. Albert
Notary Public

My Commission Expires:

July 23, 1974