


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Rush County, Sec. 14 Twp. 17S Rge. 17W E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines
NW NE NE

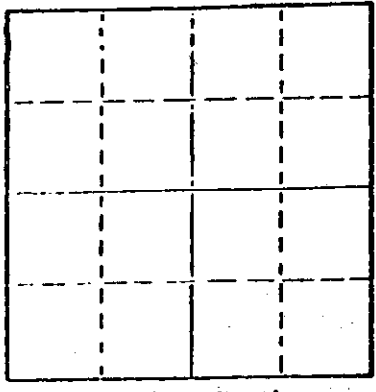

Locate well correctly on above
Section Plot

Lease Owner Frontier Oil Company
Lease Name Erni 'A' Well No. 1
Office Address 1720 Kansas State Bank Bldg. Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) Gas Well

Date Well completed 4-28-1962
Application for plugging filed 7-13-1978
Application for plugging approved 7-17-1978
Plugging commenced 8-16-1978
Plugging completed 8-16-1978
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production Sept. 1976

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface				8 5/8	201	-0-
				4 1/2	3573	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Max press 2500# Cement from 2750' to 3000'
Shut in press 2500# " " 0 to 400'
Mixed 45 sx port cement followed by 25 sx gel. R. hole plug and mixed 45 sx port cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing, Russell, Kansas

STATE OF Kansas COUNTY OF Sedgwick, ss.
Richard D. Parker (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Russell, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of August, 1978

[Signature]
Notary Public.

My commission expires 10-1-81.

Maxine Starr
Notary Public
8-23-78
AUG 23 1978

CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG

Erni "A" No. 1

CASING RECORD:	COMPANY:	Frontier Oil Company	DESCRIPTION:	NW NE NE 14-17S-17W
8 5/8" @ 201 w/135 sx cement	CONTRACTOR:	Red Tiger Drilling Co.		Rush Co., Kansas
4 1/2" @ 3573 w/275 sx cement	COMMENCED:	April 20, 1962	ELEVATION:	2050 DF 2053 RB
	COMPLETED:	April 28, 1962		
TOTAL DEPTH: 3574'				

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface soil, Clay, Sand, Shale	0	200	
Shale	200	570	
Sand	570	775	
Shale & Sand	775	820	
Shale	820	1146	
Anhydrite	1146	1284	
Shale Redbeds	1284	1545	
Shale & Shells	1545	1905	
Shale	1905	1930	
Shale & Lime	1930	3052	
Lime	3052	3574	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

FRONTIER OIL COMPANY

George A. Angle

 George A. Angle

Subscribed and sworn to before me this 17th day of May, 1962.

Messie Head

 Notary Public

My Commission Expires:

11-17-62

RECEIVED
 STATE OF KANSAS COMMISSION
 7-17-78
 JUL 17 1978

CONSERVATION BUREAU
 Wichita, Kansas