


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

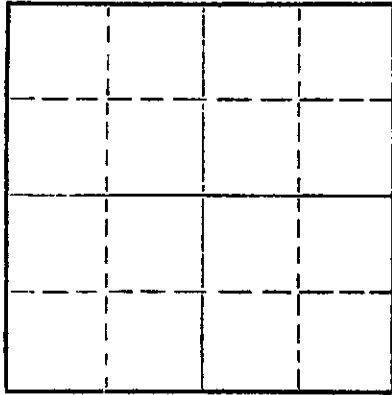

Locate well correctly on above
Section Plat

Rush County, Sec. 17 Twp. 17S Rge. 17W (E) (W) X
Location as "NE/CNW/SW" or footage from lines C NE/4
Lease Owner John O. Farmer, Inc.
Lease Name #1 Daubert Well No. 1
Office Address 370 W. Wichita, Russell, Kansas 67665
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed October 14 19 73
Application for plugging filed October 14 19 73
Application for plugging approved October 14 19 73
Plugging commenced October 14 19 73
Plugging completed October 14 19 73
Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes.

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3627' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	213'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

50 sx. 50-50 pozmix cement @ 425'
25 sx. @ 210'
1/2 sk. Halls & 10 sx. @ 40'

RECEIVED
STATE CORPORATION COMMISSION
OCT 25 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
Address 1720 Wichita Plaza, Wichita, Kansas 67202


STATE OF Kansas, COUNTY OF Sedgwick, ss.
Linda Mowrey (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Linda Mowrey
1720 Wichita Plaza, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 15th day of October, 1973

My commission expires March 8, 1977

Linda N. Dickens
Notary Public.



DRILLERS LOG

#1 Daubert

CASING RECORD:	COMPANY:	John O. Farmer, Inc.	DESCRIPTION:
8-5/8" @ 213' w/150 sx. cement	CONTRACTOR:	Red Tiger Drilling Co.	C NE/4 17-17S-17W Rush County, Kansas
	COMMENCED:	October 5, 1973	
TOTAL DEPTH: 3627'	COMPLETED:	October 14, 1973	ELEVATION:

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS:</u>
Clay and Shale	0	215	
Shale	215	580	
Sand	580	805	
Red Bed	805	1169	
Anhydrite	1169	1206	
Shale	1206	1871	
Shale and Lime	1871	3010	
Lime	3010	3627	

RECEIVED
STATE CORPORATION COMMISSION
OCT 25 1973
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Linda Mowrey
Linda Mowrey

Subscribed and sworn to before me this 18th day of October, 1973.

Linda H. Dickens
Notary Public

My Commission Expires: 3-8-77

