

ENTERED

OCT 27 2004

ACO-4
8/90

05-Cons-104-CCOM

OPERATOR OXY USA Inc. DOCKET # DMP100401 DATE 10/20/04
 ADDRESS P.O. Box 2528 OPERATOR'S LICENSE # 5447
Liberal, KS 67905 API NO. ~~15-189-20667~~ 15-129-21741-00-00
 LEASE Winter Morrow Unit WELLNO. 105
 QUARTER S/2 SE NW SEC 13 TWP 33 South RNG 43 West

COMMINGLING 82-3-123

RECEIVED
OCT 22 2004
KCC WICHITA

X 1. Description of the well.
A plat showing:

- a) Location of subject well.
- b) Location of other wells on the lease.
- c) Location of offsetting wells and operator's name.

X 2. Names and upper and lower limits of the source of supply involved.

(NAME) Morrow (PERFS) 4563-4614
 (NAME) Osage (PERFS) 5610-5671
 (NAME) _____ (PERFS) _____

X 3. Wireline log of the subject well.

____ 4. A complete ACO-1 form. (Original pending commingle order)


X 5. Expected production, oil - gas - water, for each source of supply.

FORMATION	<u>Morrow</u>	BOPD	_____	MCF	_____	BWPD	<u>0</u>
FORMATION	<u>Osage</u>	BOPD	<u>0</u>	MCF	_____	BWPD	<u>400</u>
FORMATION	_____	BOPD	_____	MCF	_____	BWPD	_____
FORMATION	_____	BOPD	_____	MCF	_____	BWPD	_____
ESTIMATED COMBINED TOTAL		BOPD	<u>.0</u>	MCF	<u>.0</u>	BWPD	<u>400.0</u>

X 6. Application shall be supported by an Affidavit and shall contain a certificate showing service of a copy of the application without attachments to the offsetting operators. You are responsible for this. Unless waivers are obtained, applications are held for fifteen days to give offsetting operators time to file objections. If waivers are obtained, applications can be processed immediately. If objections are filed, applications are then set for hearing.

R 43 W

R 42 W

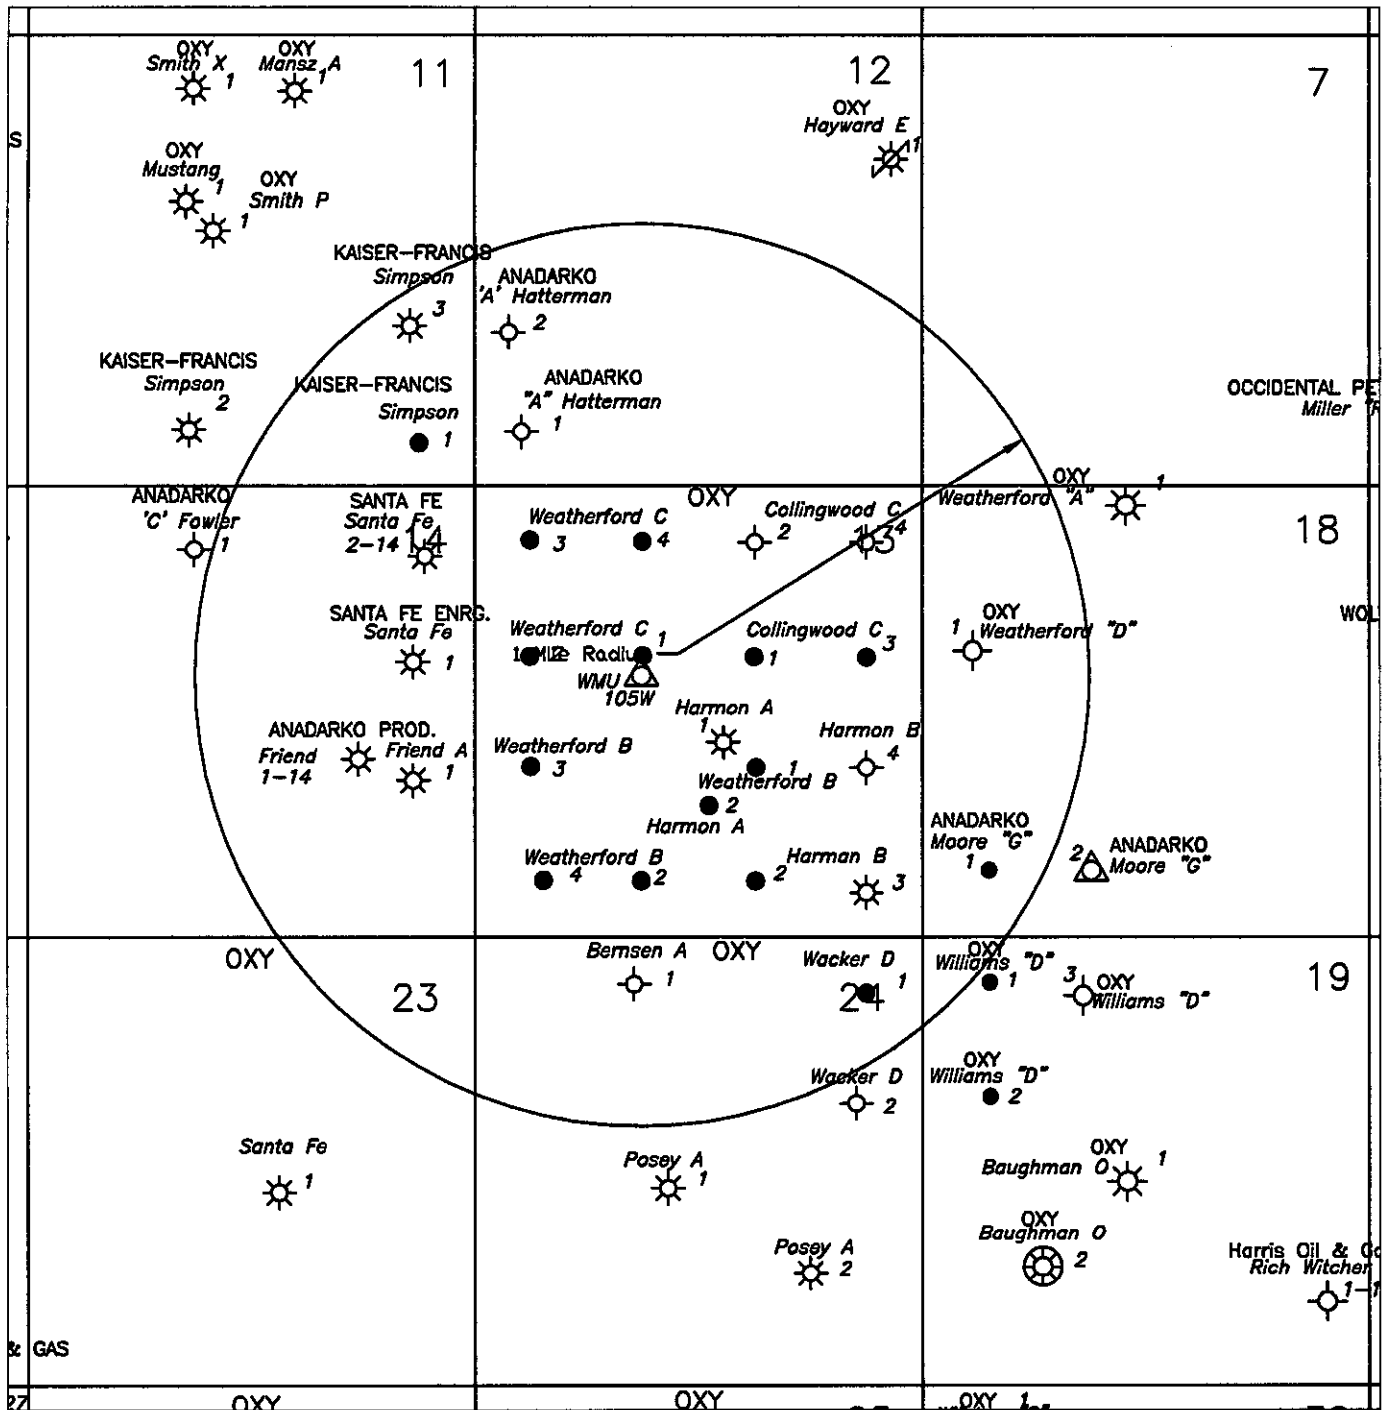

Legend

- Drilled & Abandoned
- Gas Well
- Oil Well
- Service Well
- Saltwater Disposal
- Location
- Plugged & Abandoned


WMU 105W		
(Winter Morrow Unit)		
2218 'FNL 1966' FWL		
Sec. 13-33S-43W		
Morton Co., Kansas		
API: 15-129-21741-0000		
By: DLG	Date: 10/08/2004	Drawing: WMU 105W.dwg

OCCIDENTAL

Field Name ELKHART
Well Name WMU 105W

Prepared By Robert Marciano
Date 09/20/2004
Serial No. _____
API # 15-128-21741-00

Elevation = _____

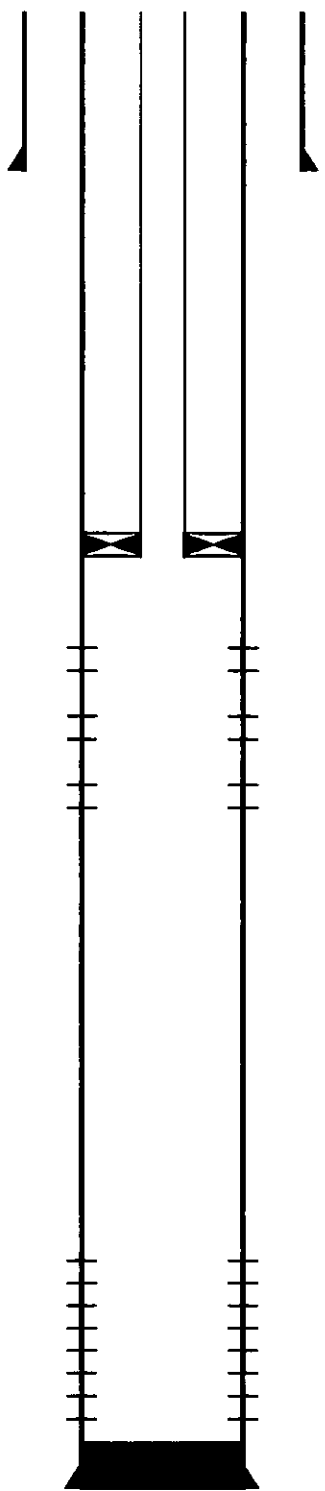

8 5/8" 24.0 # J-55 8rd Csg Set @ 1393'

2 3/8" 4.7 # 8 rd Internally coated Tbg Set @ 4525'
Guiberson plastic coated pkr.

Perfs @ 4563'-81'

Perfs @ 4585'-99'

Perfs @ 4603'-14'

Perfs @ 5610'-39'

Perfs @ 5650'-54'

Perfs @ 5658'-64'

Perfs @ 5668'-85'

TOC @ 5641'.
6 1/2" 14.0 # J-55 8rd Csg Set @ 5685'

TD @ 5687' W/ 7-7/8" " Bit

Date Drilled 09/13/2004 Spudded: 08/31/2004
Date Deepened _____ N/A _____
Date Sidetracked _____ N/A _____
No. of Rig Workovers _____
to Date _____ None _____
Last Rig Workover _____
No. Rig Days _____
Type _____ IDC _____ EXP _____

Age of Tubing N/A Date Replaced N/A
Cumulative Production from Present Well Setting
MBO _____ MMCF _____ MBW _____
Annulus Filled With 2.0 % KCl
Cement Top at _____ Ft. (_____ " Csg)
Calc. _____ (using _____ " Washout)
CBL _____ (Date _____)
Other _____

RECEIVED
OCT 22 2004
KCC WICHITA

AFFIDAVIT OF NOTICE SERVED

RE: Application for : OXY USA Inc.

2218 FNL, 1966 FWL
Morton County, Kansas

Well Name: Winter Morrow Unit 105W Legal Location NW of Sec. 13-33S-43W

The undersigned hereby certifies that she is a duly authorized agent for the applicant, and that on the 20th

day of October, 2004, a true and correct copy of the application referenced above was delivered or mailed to the following parties:

NOTE: A copy of this affidavit must be served as a part of the application.

<u>Company Name</u>	<u>Address</u>	<u>City</u>
Kaiser-Francis Oil Company	P. O. Box 21468	Tulsa, OK 74121 The Woodlands, TX 77380
Anadarko Petroleum Corporation	1201 Lake Robbins Drive	Houston, TX 77042
DMS Oil Company	3000 Wilcrest #250	Midland, TX 79701
Santa Fe Energy Operating Partners LP	550 W. Texas, Suite 1330	

RECEIVED
OCT 22 2004
KCC WICHITA

Signed this 20th day of October, 2004.

Vicki Carder

Vicki Carder, Capital Project
Applicant or Duly Authorized Agent

Subscribed and sworn to before me this 20th day of October, 2004



Kathleen R. Poulton

Notary Public

My Commission Expires: November 8, 2006

Protests may be filed by any party having a valid interest in the application. Petitions for protests shall be in writing and shall clearly identify the name and address of the Protestant and the title of the application. The petition shall include a clear and concise statement of the direct and substantial interest of the Protestant in the proceedings, including the manner in which the Protestant may be affected, and the nature, extent, character and grounds of the protest. Protestants shall serve the protests upon the applicant by mail or personal service at the same time or before the Protestant files the protest with the Conservation Division.



OXY USA Inc.

1701 N. Kansas, Liberal, KS 67901
P.O. Box 2528, Liberal, KS 67905-2528

October 20, 2004

Kansas State Corporation Commission
Conservation Division
Finney State Office Building
130 S. Market, Room 2078
Wichita, Kansas 67202-3802

RECEIVED
OCT 22 2004
KCC WICHITA

RE: OXY USA Inc.
Winter Morrow Unit 105W
NW/4 13-33S-43W
Morton County, Kansas

Dear Sir:

Please find enclosed a commingling application Form ACO-4 with attachments for the subject well.

Commingling application for the subject well will be for a "dump flood". The Morrow formation is currently non-producing. Along with commingle application, a copy of the proposed wellbore completion is enclosed.

If there are any questions or you require further information, please contact me at the above address or by phone at (620) 629-4242.

Sincerely yours,

Vicki Carder
Capital Projects

Attachments

Cc: Oxy - Houston
Oxy - Elkhart
Well File