

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-161-19038-00-00  
Spot: NENWSE Sec/Twnshp/Rge: 25-11S-8E  
2310 feet from S Section Line, 1650 feet from E Section Line  
Lease Name: YAEGE Well #: 4  
County: RILEY Total Vertical Depth: 1830 feet

Operator License No.: 5030  
Op Name: VESS OIL CORPORATION  
Address: 1700 WATERFRONT PKWY BLDG 500  
WICHITA, KS 67206

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	5.5	1797		125 SX
SURF	8.625	226		200 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 04/22/2013 12:00 AM  
Plug Co. License No.: 6819 Plug Co. Name: SCOTT'S WELL SERVICE INC  
Proposal Rcvd. from: CASEY COATS Company: \_\_\_\_\_ Phone: (316) 682-1537

Proposed Plugging Method: Per KCC District #2 instructions

Plugging Proposal Received By: PATRICK SHIELDS Witness Type: NONE  
Date/Time Plugging Completed: 04/22/2013 12:00 AM KCC Agent: PATRICK SHIELDS

Actual Plugging Report:

CONSOLIDATED LOAD HOLE. MIX AND PUMP 25 SX CLASS A, 3% CC. DISPLACE CEMENT TO BOTTOM. PULL UP TO 1472'. MIX AND SHOT 50 SX CLASS A, 3% CC. PULL TUBING OUT. WAIT. WIRELINE TAG CEMENT TO 1225'. WAIT ONE HOUR. LOAD AND PRESSURE UP TO 400#, IT HOLDS. DYNA-LOG PERF 4-WAY HOLES AT 275'. TIE ONTO CASING AND GET CIRCULATION OUT 5 1/2/8 5/8 5/8 ANNULUS. MIX AND PUMP 110 SX CLASS A 3% CC. CIRCULATED GOOD CEMENT. LEFT SHUT IN. TICKET #38622.

Perfs:

Top	Bot	Thru	Comments
1705	1710		
1694	1698		


KCC WICHITA  
JUN 07 2013  
RECEIVED

Remarks:

Plugged through: CSG

District: 02

Signed

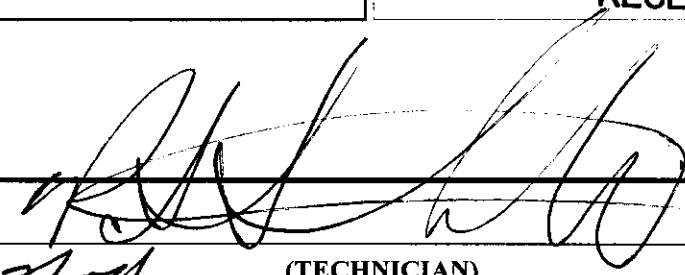

5/10/13  
(TECHNICIAN)