

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-063-20568-00-00
Spot: NWSESW Sec/Twnshp/Rge: 21-15S-26W
990 feet from S Section Line, 3630 feet from E Section Line
Lease Name: R CHENEY Well #: 6
County: GOVE Total Vertical Depth: 4313 feet

Operator License No.: 5011
Op Name: VIKING RESOURCES, INC
Address: 400 N WOODLAWN ST, STE 18
WICHITA, KS 67208

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	4307		180 SX
SURF	8.5	321		200 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 05/21/2013 11:00 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: MIKE FRITZLER Company: FRITZLER Phone: (785) 798-3641

Proposed Plugging Method: Ordered 350 sx 60/40 pozmix 4% gel cement, 400 # hulls and 11 sx gel.
Shot perforations at 1875', 900' and 320'.
Open hole.

Plugging Proposal Received By: CASE MORRIS Witness Type: COMPLETE (100%)
Date/Time Plugging Completed: 05/21/2013 4:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

Ran tubing to 4200' and pumped 11 sx gel followed by 50 sx cement w/100 # hulls.
Pulled tubing to 1875' and pumped 100 sx cement w/200 # hulls.
Pulled tubing to 900' and pumped 160 sx cement with good circulation out of casing and out the back side.
Pulled tubing. Topped off casing with 10 sx cement. Hole standing full.

GPS: 38.72973 -100.22295

Perfs:

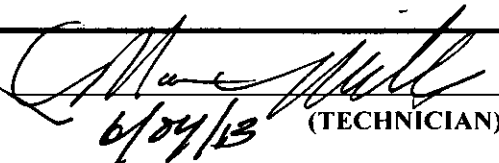
Top	Bot	Thru	Comments
4307	4313		

Remarks: SWIFT CEMENT TICKET # 24718

Plugged through: TBG

District: 04

Signed


6/24/13 (TECHNICIAN)

CM

KCC WICHITA
MAY 30 2013
RECEIVED

MAY 23 2013