

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-065-23935-00-00  
Spot: E2SWSESW Sec/Twnshp/Rge: 17-10S-25W  
330 feet from S Section Line, 1900 feet from W Section Line  
Lease Name: RIEDEL Well #: 17-1  
County: GRAHAM Total Vertical Depth: 4120 feet

Operator License No.: 8914  
Op Name: H & C OIL OPERATING INC.  
Address: PO BOX 86  
PLAINVILLE, KS 67663

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	255		150 sx

Well Type: DH UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 05/31/2013 12:00 AM  
Plug Co. License No.: 30606 Plug Co. Name: MURFIN DRILLING CO., INC.  
Proposal Rcvd. from: BERNIE Company: MURFIN DRILLING CO., INC. Phone: (785) 443-1081

Proposed Plugging Method: Ordered 220 sx 60/40 pozmix - 4% gel cement with 1/4# flo- seal per sack.  
Space all plugs with heavy drilling mud through drill pipe.

Plugging Proposal Received By: MARVIN MILLS Witness Type: NONE  
Date/Time Plugging Completed: 05/31/2013 4:00 PM KCC Agent: MARVIN MILLS

Actual Plugging Report:

1st plug @2220 w/25 sx  
2nd plug @1300 w/100 sx  
3rd plug @305 w/40 sx  
4th plug @40 w/10 sx  
  
Rathole 30 sx Mousehole 15 sx

Perfs:

Remarks: QUALITY

Plugged through: DP

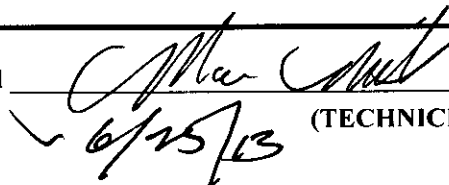
KCC WICHITA

JUN 19 2013

RECEIVED

District: 04

Signed

  
(TECHNICIAN)

CM