

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-009-04064-00-00
Spot: SWSENE **Sec/Twnshp/Rge:** 11-17S-13W
2310 feet from N Section Line, 990 feet from E Section Line
Lease Name: HITSCHMANN **Well #:** 1
County: BARTON **Total Vertical Depth:** 3337 **feet**

Operator License No.: 33924

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		3280		
PROD	4.5	3336		100 SX
SURF	8.625	178		125 SX

Op Name: ABARTA OIL & GAS CO., INC.
Address: 1000 GAMMA DR STE 400
PITTSBURGH, PA 15238

Well Type: OIL

UIC Docket No:

Date/Time to Plug: 06/12/2013 10:00 AM

Plug Co. License No.: 32098

Plug Co. Name: CLASSIC WELL SERVICE, INC.

Proposal Recd. from: CHRIS HOFFMAN

Company: C&K OIL

Phone: (620) 587-0150

Proposed Ordered 500 sx 60/40 pozmix 4% gel cement w/500 # hulls.

Plugging Well bridged off at 310'. Brought out pump and swivel. Drilled down to 1326'. Ran outside casing.

Method: Will plug from that depth.

Plugging Proposal Received By: BRUCE RODIE

WitnessType: COMPLETE (100%)

Date/Time Plugging Completed: 06/12/2013 2:00 PM

KCC Agent: BRUCE RODIE

Actual Plugging Report:

Ran tubing to 1266' and stacked out. Tied to tubing and pumped 75 sx cement.
Pulled tubing to 770' and perforated out bottom of tubing. Pumped 225 sx cement w/300 # hulls and no returns to surface. Shut down for 3 hours.
Tied to tubing and pumped 20 sx cement. Circulated cement out casing to surface. Shut valve on casing and pumped 60 sx cement.
Pulled tubing. Tied to casing and circulated cement out surface with 15 sx cement. Shut in with 400 psi.

GPS: 38.58789 -098.72347

Perfs:

Top	Bot	Thru	Comments
3103	3254		

Remarks: COPELAND ACID AND CEMENTING

KCC WICHITA

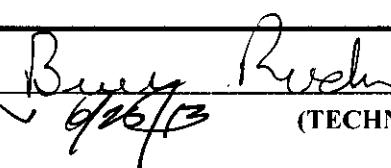
JUN 24 2013

RECEIVED

Plugged through: CSG

District: 04

Signed


6/12/13

(TECHNICIAN)

CM


6/12/13

Form CP-2/3